GLASS PASSIVATED HIGH EFFICIENCY RECTIFIERS

Reverse Voltage – 50 to 1000 Volts Forward Current – 8.0 Amperes

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0 utilizing Flame Retardant Epoxy Molding Compound
- Low power loss, high efficiency
- Low forward voltage, high current capability
- High surge capacity
- Ultra Fast recovery times, high voltage

Mechanical Data

- Case: Molded plastic TO-220A
- Mounting position: Any
- **Terminals:** Leads solderable per MIL-STD-202, method 208 guaranteed
- · Polarity: as marked

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single-phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

| • | | | | | | | | | |
|----------------------------------|---|--|--|--|--|---|--|---|--|
| Symbols | HER 801 | HER 802 | HER 803 | HER 804 | HER 805 | HER 806 | HER 807 | HER 808 | Units |
| V _{RRM} | 50 | 100 | 200 | 300 | 400 | 600 | 800 | 1000 | V |
| V _{RMS} | 35 | 70 | 140 | 210 | 280 | 420 | 560 | 700 | V |
| V _{DC} | 50 | 100 | 200 | 300 | 400 | 600 | 800 | 1000 | V |
| I _(AV) | 8.0 | | | | | | | А | |
| I _{FSM} | 150 | | | | | | | | А |
| V _F | 1.0 1.3 | | | | 1.7 | | | V | |
| l _R I _R | 10 500 | | | | | | | uA uA | |
| CJ | 80 | | | | | 50 | | | pF |
| T _{rr} | 50 | | | | 80 | | | nS | |
| $R_{\theta JC}$ | 3.0 | | | | | | | °C/W | |
| TJ | -55 to +150 | | | | | | | | °C |
| T _{Stg} | -55 to +150 | | | | | | | | °C |
| | V _{RRM} V _{RMS} V _{DC} I _(AV) I _{FSM} V _F I _R I _R C _J T _{rr} R _{@JC} T _J | Symbols 801 V_{RRM} 50 V_{RMS} 35 V_{DC} 50 $I_{(AV)}$ 50 $I_{(AV)}$ 50 I_{FSM} 50 V_{F} 50 I_R 1 I_R 1 I_R 1 I_R 1 I_R 1 I_R 1 T_{rr} 1 $R_{\sigma JC}$ 1 T_J 1 | $\begin{array}{ c c c c c } Symbols & 801 & 802 \\ \hline V_{RRM} & 50 & 100 \\ \hline V_{RMS} & 35 & 70 \\ \hline V_{DC} & 50 & 100 \\ \hline I_{(AV)} & & & \\ \hline I_{FSM} & & & \\ \hline I_{FSM} & & & \\ \hline V_F & 1.0 \\ \hline I_R & & & \\ I_R & & & \\ \hline C_J & & & \\ \hline T_{Irr} & & \\ \hline R_{^{0}JC} & & \\ \hline T_J & & & \\ \hline \end{array}$ | $\begin{array}{ c c c c c } Symbols & 801 & 802 & 803 \\ \hline V_{RRM} & 50 & 100 & 200 \\ \hline V_{RMS} & 35 & 70 & 140 \\ \hline V_{DC} & 50 & 100 & 200 \\ \hline I_{(AV)} & & & & \\ \hline I_{FSM} & & & & \\ \hline V_F & 1.0 & & & \\ \hline V_F & 1.0 & & & \\ \hline V_R & & & & & \\ \hline V_R & & & & & \\ \hline I_R & & & & & \\ \hline V_R & & & & & \\ \hline I_R & & & & & \\ \hline SM & & & & & \\ \hline I_R & & & & & \\ \hline SM & & & & & \\ \hline I_R & & & & & \\ \hline SM &$ | $\begin{array}{c c c c c c c c c c c c c c c c c c c $ | $\begin{array}{c c c c c c c c } Symbols & 801 & 802 & 803 & 804 & 805 \\ \hline V_{RRM} & 50 & 100 & 200 & 300 & 400 \\ \hline V_{RMS} & 35 & 70 & 140 & 210 & 280 \\ \hline V_{DC} & 50 & 100 & 200 & 300 & 400 \\ \hline I_{(AV)} & & & & & & & \\ \hline I_{FSM} & & & & & & & & \\ \hline V_F & 1.0 & 1.3 & & & & & \\ \hline V_F & 1.0 & 1.3 & & & & & \\ \hline I_R & & & & & & & & & & \\ \hline I_R & & & & & & & & & & \\ \hline I_R & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & & & & & & & \\ \hline I_R & & & & & & & & & & & & & & & & & & &$ | $\begin{array}{c c c c c c c c c c c c c c c c c c c $ | $\begin{array}{ c c c c c c c } \hline Symbols & 801 & 802 & 803 & 804 & 805 & 806 & 807 \\ \hline V_{RRM} & 50 & 100 & 200 & 300 & 400 & 600 & 800 \\ \hline V_{RMS} & 35 & 70 & 140 & 210 & 280 & 420 & 560 \\ \hline V_{DC} & 50 & 100 & 200 & 300 & 400 & 600 & 800 \\ \hline I_{(AV)} & $$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$$ | $\begin{array}{c c c c c c c c c c c c c c c c c c c $ |

Note: 1. Measured at 1 MHz and applied reverse voltage of 4.0 Volts D.C.

2. Reverse recovery test conditions: $I_F = 0.5A$, $I_R = 1.0A$, $I_{RR} = 0.25A$.

3. Thermal Resistance from junction to case mounted on heat sink.




TO-220A 10.5 3.9 2.75 4.7 3.8 3.9 3.7 4.7 3.8 1.3 1.55 14.8 1.3 1.4 1.3 1.4 1.3 1.4 1.3 1.4 1.3 1.4 1.3 1.4 1.3 1.4 1.3 1.4 1.3 1.4 1.3 1.4 1.3 1.4 1.3 1.4 1.3 1.4 1.3 1.4 1.3 1.4 1.3 1.4 1.3 1.4 1.3 1.5 1.4 1.3 1.4 1.3 1.5 1.3 1.4 1.3 1.3 1.4 1.3 1.5 1.3 1.4 1.3 1.4 1.3 1.5 1.4 1.3 1.5 1.5 1.5 1.3 1.5 1.5 1.3 1.5 1.1 1.5 1.5 1.5 1.5 1.1 1.51

CASE POSITIVE CASE NEGATIVE SUFFIX "R"


Dimensions in mm

RATINGS AND CHARACTERISTIC CURVES


REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

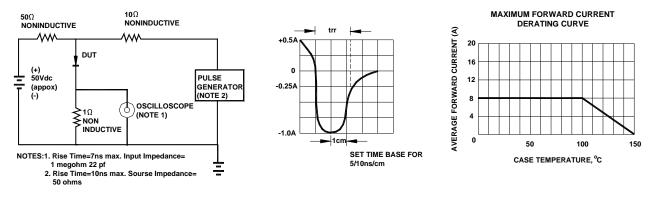

TYPICAL REVERSE CHARACTERISTICS



PERCENT OF RATED PEAK REVERSE VOLTAGE, (%)

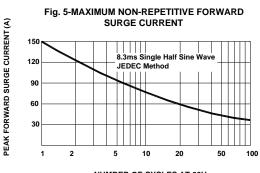

NUMBER OF CYCLES AT 60Hz

Fig. 4-TYPICAL FORWARD CHARACTERISTICS


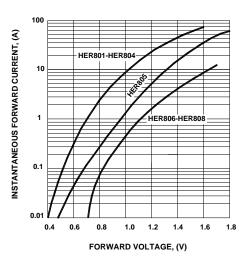


Fig. 6-TYPICAL JUNCTION CAPACITANCE



REVERSE VOLTAGE. (V)

