

1N4148W-BL-HAF


Silicon Epitaxial Planar Switching Diode

Features

- Fast switching
- These diodes are also available in other case style including the DO-35 case with the type designation 1N4148, the MiniMELF case with the type designation LL4148 and the MicroMELF case with the type designation MCL4148.
- Halogen and Antimony Free(HAF), RoHS compliant

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

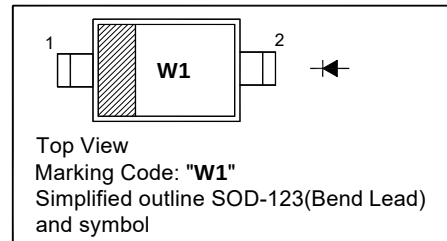


Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Peak Reverse Voltage	V_{RM}	100	V
Reverse Voltage	V_R	75	V
Average Rectified Forward Current	$I_{F(AV)}$	150	mA
Non-repetitive Peak Forward Surge Current at $t = 1$ s at $t = 1$ ms at $t = 1$ μ s	I_{FSM}	0.5 1 4	A
Power Dissipation	P_{tot}	400	mW
Thermal Resistance from Junction to Ambient Air	$R_{\theta JA}$	312	$^\circ\text{C}/\text{W}$
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 65 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
Reverse Breakdown Voltage at $I_R = 1$ μ A	$V_{(BR)R}$	75	-	V
Forward Voltage at $I_F = 1$ mA at $I_F = 10$ mA at $I_F = 50$ mA at $I_F = 150$ mA	V_F	- - - -	0.715 0.855 1 1.25	V
Peak Reverse Current at $V_R = 75$ V at $V_R = 20$ V at $V_R = 75$ V, $T_J = 150^\circ\text{C}$ at $V_R = 25$ V, $T_J = 150^\circ\text{C}$	I_R	- - - -	1 25 50 30	μ A nA μ A μ A
Total Capacitance at $V_R = 0$ V, $f = 1$ MHz	C_T	-	2	pF
Reverse Recovery Time at $I_F = 10$ mA, $I_{rr} = 0.1 \times I_R$, $V_R = 6$ V, $R_L = 100$ Ω	t_{rr}	-	4	ns



1N4148W-BL-HAF

Electrical Characteristics Curves

Fig 1. Power Dissipation vs Ambient Temperature

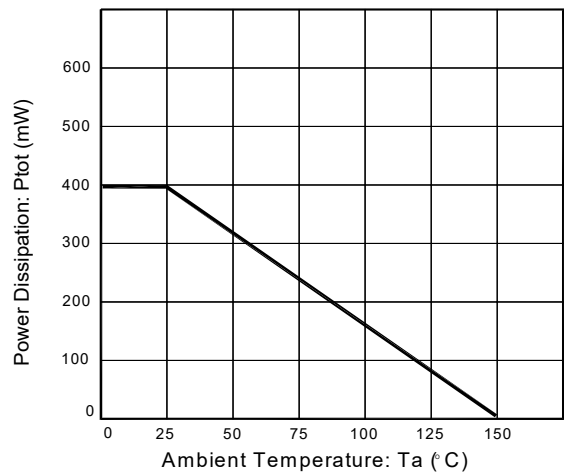


Fig 2. Total Capacitance vs. Reverse Voltage

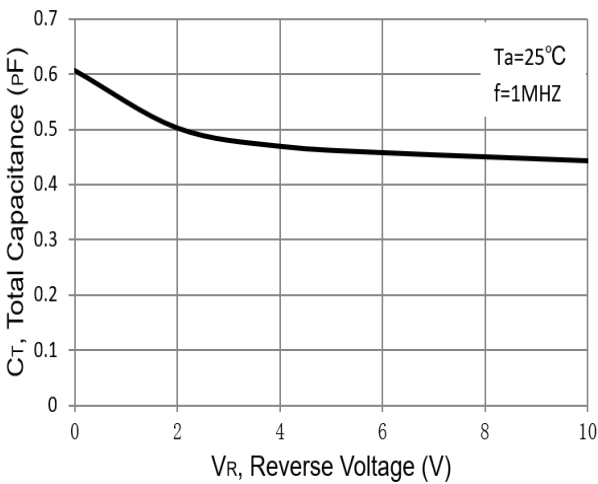


Fig 3. Reverse Current vs. Reverse Voltage



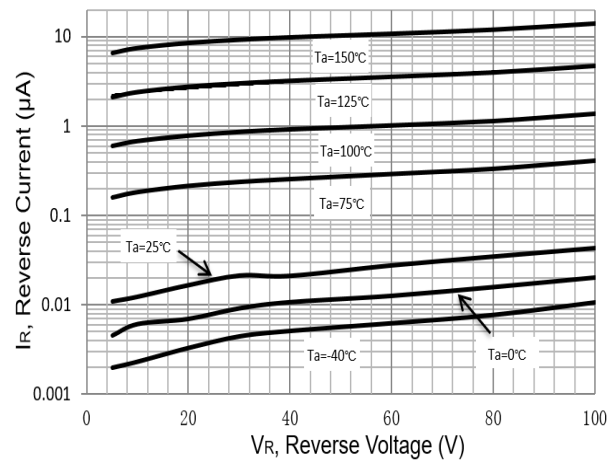


Fig 4. Forward Characteristics

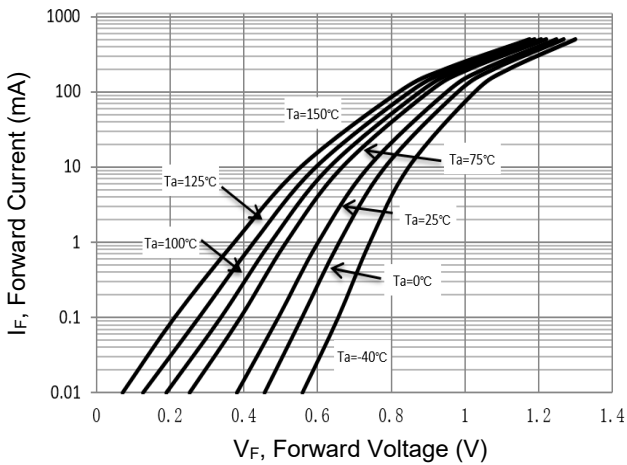


1N4148W-BL-HAF

PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SOD-123(Bend Lead)

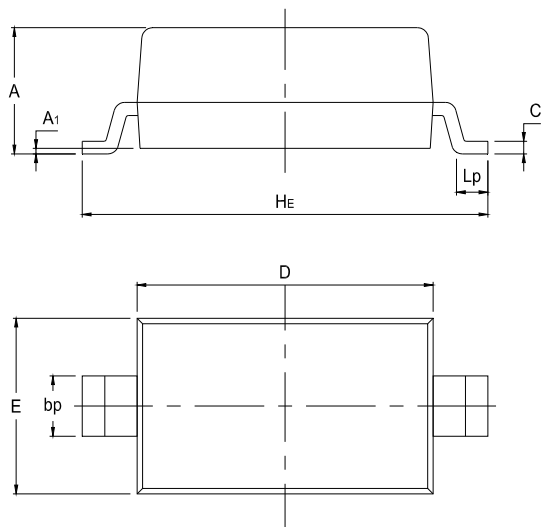

UNIT	A	A ₁	bp	C	D	E	H _E	L _p	Q
mm	1.21	0.1	0.7	0.14	2.7	1.7	3.8	0.4	0.65
	0.91	0	0.5	0.08	2.54	1.5	3.5	0.2	0.55

Recommended Soldering Footprint



Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	(inch)	mm	(inch)	
SOD-123BL	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000

Marking information

" III " = Cathode line
" • " = HAF (Halogen and Antimony Free)
" W1 " = Part No.
Font type: Arial

