

RS801 THRU RS807

SINGLE-PHASE SILICON BRIDGE RECTIFIERS


Reverse Voltage – 50 to 1000 Volts

Forward Current – 8.0 Amperes

Features

- Low leakage
- Low forward voltage
- Mounting position: Any
- Surge overload rating: 250 amperes peak
- Ideal for printed circuit boards
- High forward surge current capability

RS-8

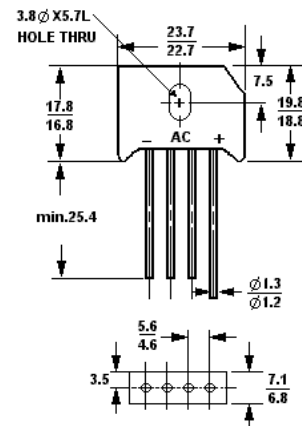


Dimensions in mm

Absolute Maximum Ratings and Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

	Symbols	RS 801	RS 802	RS 803	RS 804	RS 805	RS 806	RS 807	Units
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS bridge input voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified output current at $T_C = 75^\circ\text{C}$ with heat sink	I_O	8							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	250							Amps
Maximum forward voltage drop per element at 8A DC	V_F	1.1							Volts
Maximum reverse current at rated DC blocking voltage per element	@ $T_A = 25^\circ\text{C}$	10							μAmps
	@ $T_C = 100^\circ\text{C}$	0.2							mAmps
Operating and storage temperature range	T_J, T_{Stg}	-55 to +150							$^\circ\text{C}$



Dated : 09/01/2003

