

2W005G THRU 2W10G

SILICON GLASS PASSIVATED BRIDGE RECTIFIERS

Reverse Voltage – 50 to 1000 V

Forward Current – 2 A


Features

- Rating to 1000 V PRV
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- Glass passivated chip junction

Mechanical Data

- **Case:** WOM, Molded plastic
- **Polarity:** As marked on Body

WOM

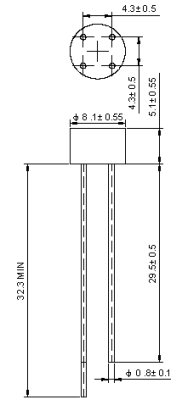


Dimensions in millimeters

Absolute Maximum Ratings and Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

| Parameter | Symbols | 2W005G | 2W01G | 2W02G | 2W04G | 2W06G | 2W08G | 2W10G | Units |
|--|----------------|---------------|-------|-------|-------|-------|-------|-------|---------------------|
| Maximum Recurrent Peak Reverse Voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS Voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC Blocking Voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum Average Forward Output Current at $T_A = 55\text{ }^{\circ}\text{C}$ | $I_{F(AV)}$ | 2 | | | | | | | A |
| Peak Forward Surge Current, 8.3 ms Single Half-Sine-Wave Superimposed on Rated Load (JEDEC Method) | I_{FSM} | 50 | | | | | | | A |
| Maximum Instantaneous Forward Voltage at 1 A | V_F | 1 | | | | | | | V |
| Maximum Reverse Current $T_A = 25\text{ }^{\circ}\text{C}$ at Rated DC Blocking Voltage $T_A = 100\text{ }^{\circ}\text{C}$ | I_R | 10 1 | | | | | | | μA mA |
| Operating and Storage Temperature Range | T_J, T_{Stg} | - 55 to + 150 | | | | | | | $^{\circ}\text{C}$ |



2W005G THRU 2W10G

FIG.1 – PEAK FORWARD SURGE CURRENT

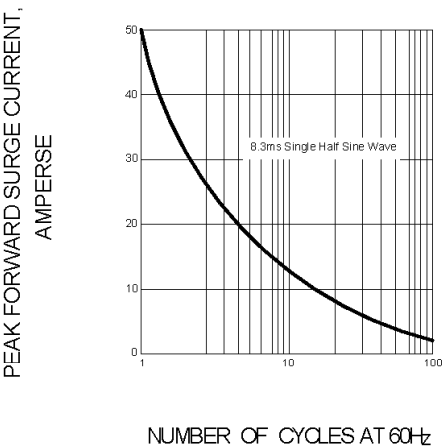


FIG.2 – FORWARD DERATING CURVE
OUTPUT RECTIFIED CURRENT

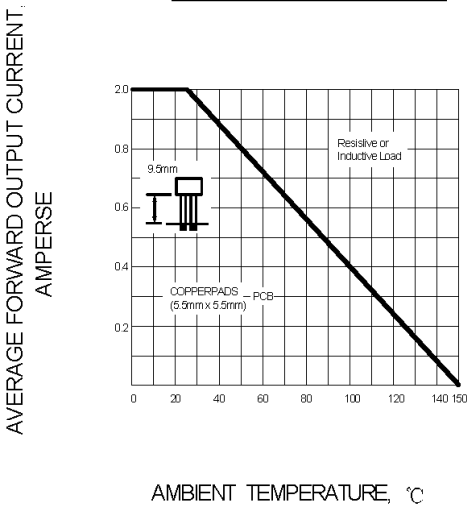


FIG.3 – TYPICAL FORWARD CHARACTERISTIC

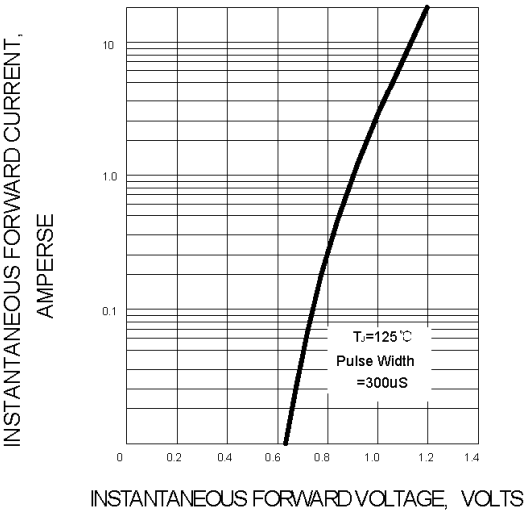


FIG.4 – TYPICAL REVERSE CHARACTERISTIC

