

HER101 THRU HER108

HIGH EFFICIENCY RECTIFIERS


Reverse Voltage – 50 to 1000 Volts

Forward Current – 1.0 Ampere

DO-41

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound
- Void-free Plastic in DO-41 package
- 1.0 amperes operation at $T_a = 55^\circ\text{C}$ with no thermal runaway
- Ultra Fast switching for high efficiency
- Exceeds environmental standards of MIL-S-19500/228

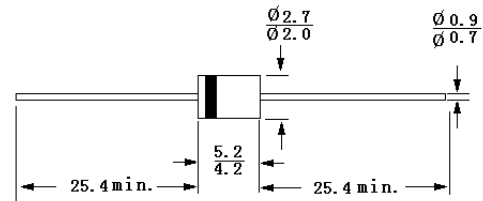

Dimensions in mm

Mechanical Data

- **Case:** Molded plastic, DO-41
- **Lead:** MIL-STD-202 method 208 guaranteed
- **Polarity:** Band denotes cathode
- **Mounting Position:** Any


Absolute Maximum Ratings and Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load.

| | Symbols | HER 101 | HER 102 | HER 103 | HER 104 | HER 105 | HER 106 | HER 107 | HER 108 | Units |
|--|-----------------------------------|-------------|------------|------------|------------|------------|------------|------------|------------|-------|
| Maximum repetitive peak reverse voltage | V _{RRM} | 50 | 100 | 200 | 300 | 400 | 600 | 800 | 1000 | Volts |
| Maximum RMS voltage | V _{RMS} | 35 | 70 | 140 | 210 | 280 | 420 | 560 | 700 | Volts |
| Maximum DC blocking voltage | V _{DC} | 50 | 100 | 200 | 300 | 400 | 600 | 800 | 1000 | Volts |
| Maximum average forward rectified current at T _A = 55°C | I _O | 1.0 | | | | | | | | Amp |
| Peak forward surge current 8.3mS single half sine-wave superimposed on rated load (JEDEC method) | I _{FSM} | 30 | | | | | | | | Amps |
| Maximum instantaneous forward voltage at 1A DC | V _F | 1.0 | | | 1.3 | | 1.7 | | | Volts |
| Maximum reverse current T _J = 25°C at rated reverse voltage T _J = 100°C | I _R | 10 500 | | | | | | | | μAmps |
| Maximum reverse recovery time (Note 1) | t _{rr} | 50 | | | | | 75 | | | nSec |
| Typical junction capacitance (Note 2) | C _J | 17 | | | | | | | | pF |
| Typical junction resistance (Note 3) | R _{θJA} | 60 | | | | | | | | °C/W |
| Operating and storage temperature range | T _J , T _{Stg} | -55 to +150 | | | | | | | | °C |

Notes:



1. Test Conditions: $I_F = 0.5\text{A}$, $I_R = -1\text{A}$, $I_{RR} = -0.25\text{A}$.
2. Measured at 1MHz and applied reverse voltage of 4 volts DC.
3. Thermal resistance from junction to ambient and from junction to lead length 0.375"(9.5mm) P.C.B. mounted.




Dated : 22/03/2003

HER101 THRU HER108


REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

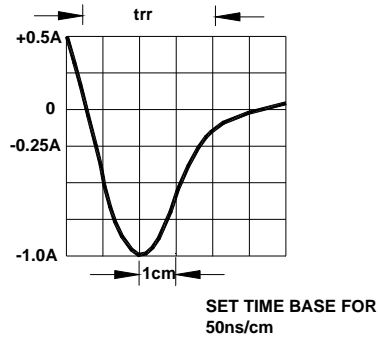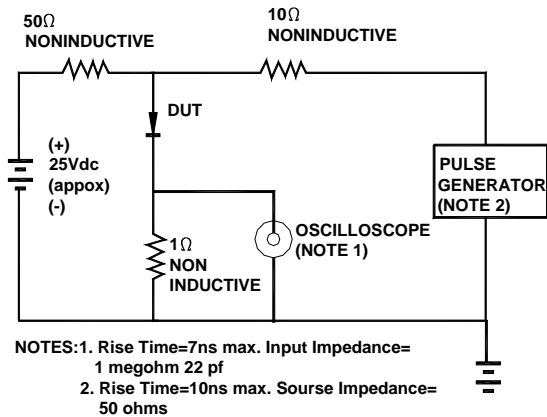


FORWARD CHARACTERISTICS

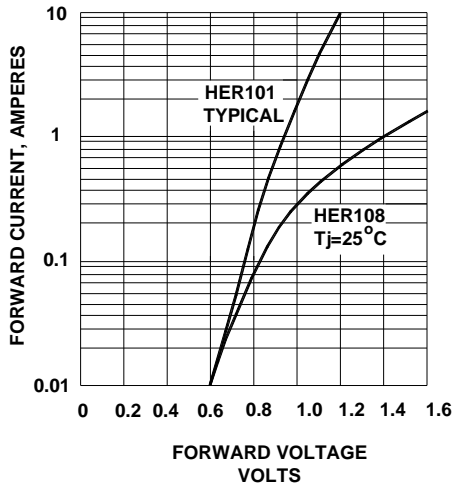

FORWARD CURRENT DERATING CURVE

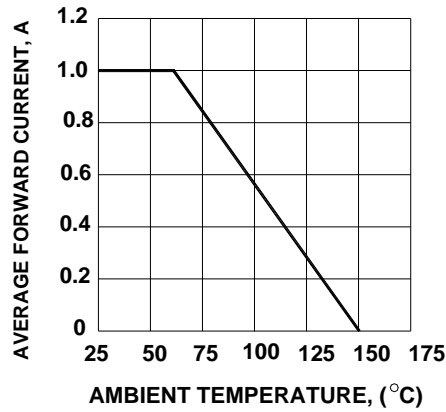

TYPICAL JUNCTION CAPACITANCE

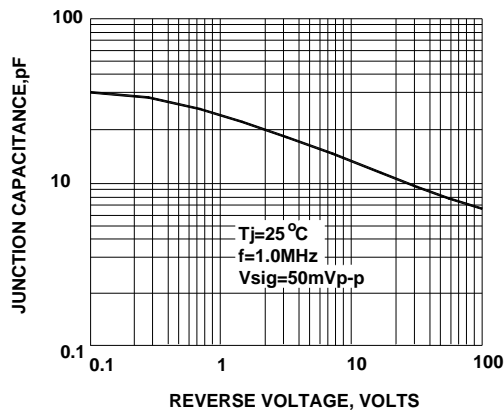

PEAK FORWARD SURGE CURRENT

