

KBL4005 THRU KBL410

SINGLE-PHASE GLASS PASSIVATED SILICON BRIDGE RECTIFIERS

Reverse Voltage - 50 to 1000 V


Forward Current - 4 A

Features

- Ideal for printed circuit board
- Low forward voltage drop
- Low reverse leakage current
- High surge current capability
- Surge overload rating: 200 Amperes peak

Mechanical Data

- Case: KBL
- Mounting Position: Any

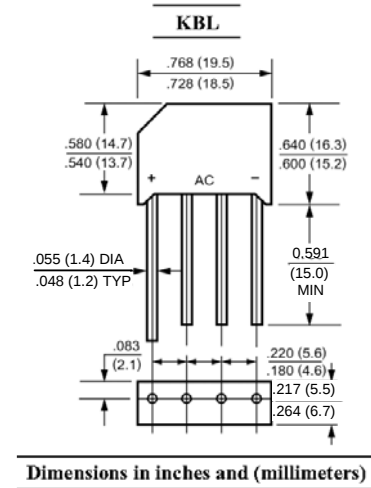


Maximum Ratings and Electrical Characteristics

Ratings at $T_a = 25^\circ\text{C}$ ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.


Parameter	Symbols	KBL4005	KBL401	KBL402	KBL404	KBL406	KBL408	KBL410	Units
	Marking	KBL4005	KBL401	KBL402	KBL404	KBL406	KBL408	KBL410	-
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Average Rectified Rectified Current at $T_a = 50^\circ\text{C}$	$I_{F(AV)}$	4							A
Non-repetitive Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	150							A
Maximum Forward Voltage per Leg at 4 A DC	V_F	1.1							V
Maximum Reverse Current at Rated $T_a = 25^\circ\text{C}$ DC Blocking Voltage per Leg $T_a = 100^\circ\text{C}$	I_R	10 1							μA mA
Typical Junction Capacitance ¹⁾	C_j	40							pF
Operating Junction Temperature Range	T_j	- 55 to + 125							$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150							$^\circ\text{C}$

¹⁾ Measured at 1 MHz and applied reverse voltage of 4 V DC




KBL4005 THRU KBL410


Maximum Non-Repetitive Peak
Forward Surge Current

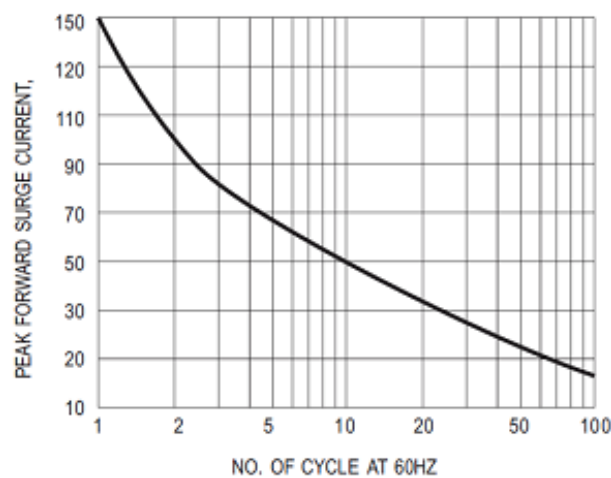

TYPICAL FORWARD CURRENT
DERATING CURVE

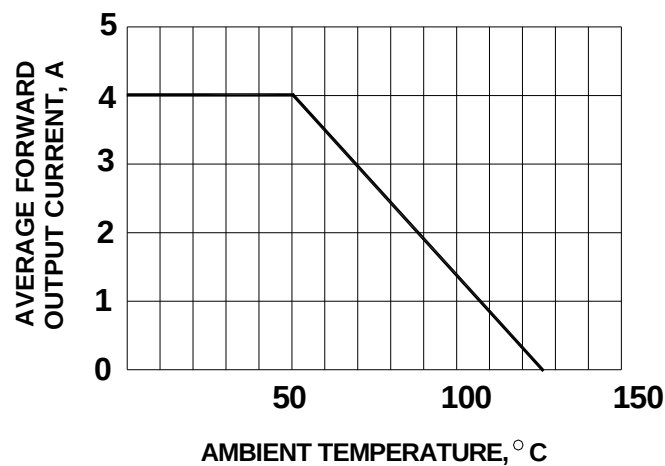

Typical Forward Characteristics

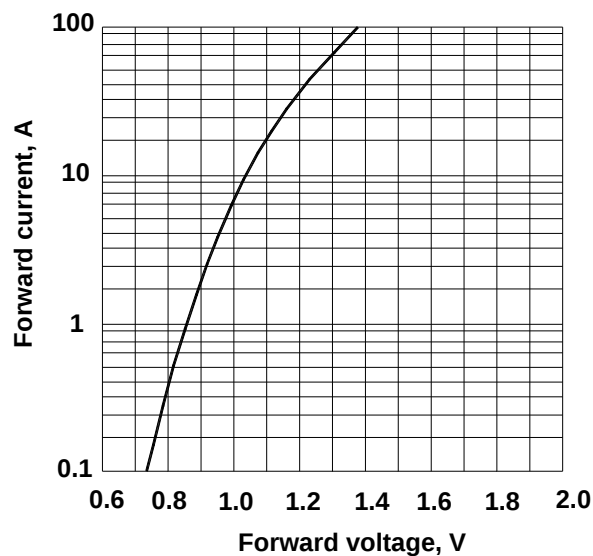

Typical Reverse Characteristics

