


KBPC50005 THRU KBPC5010

HIGH CURRENT SINGLE-PHASE BRIDGE RECTIFIERS
REVERSE VOLTAGE: 50 TO 1000 VOLTS
FORWARD CURRENT: 50 AMPERES

KBPC

Features

- Low power loss, high efficiency
- Low reverse leakage current

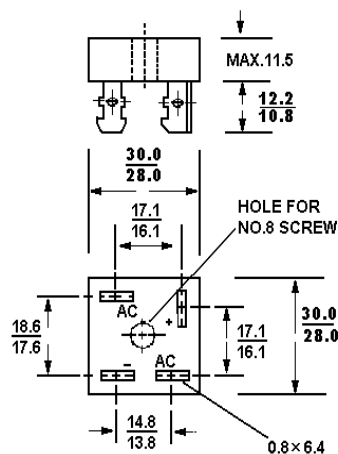

Dimensions in mm


Absolute Maximum Ratings and Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load, For capacitive load, derate current by 20%.

	Symbols	KBPC 50005	KBPC 5001	KBPC 5002	KBPC 5004	KBPC 5006	KBPC 5008	KBPC 5010	Units
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Average forward rectified current at $T_C = 55^\circ\text{C}$	I_O	50							A
Peak forward surge current, 8.3ms single half sine wave superimposed on rated load (JEDEC)	I_{FSM}	400							A
Maximum forward voltage at 25A DC and 25°C	V_F	1.2							V
Maximum reverse current $T_A = 25^\circ\text{C}$ at rated DC blocking voltage $T_A = 125^\circ\text{C}$	I_R	10 1000							μA
Typical junction capacitance (note 1)	C_j	300							pF
Typical thermal resistance (note 2)	$R_{\theta JC}$	2.6							$^\circ\text{C/W}$
Operating junction and storage temperature range	T_J, T_{Stg}	-55 to +150							$^\circ\text{C}$

Notes:

1. Measured at 1.0MHz and applied reverse voltage of 4.0 V.DC
2. Thermal resistance from junction to case per leg.



Dated : 19/07/2005

KBPC50005 THRU KBPC5010

