

LLUF4001G THRU LLUF4007G


Glass Passivated Ultrafast Recovery Rectifiers

Reverse Voltage - 50 to 1000 V

Forward Current - 1 A

Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- Ideally suited for use in very high frequency switching power supplies, inverters and as free wheeling diodes
- Ultrafast recovery time for high efficiency
- Excellent high temperature switching



Plastic case MELF (DO-213AB)
Dimensions in mm

Mechanical data

- **Case:** Molded plastic, MELF (DO-213AB)
- **Terminals:** Solder plated, solderable per MIL-STD-750, method 208 guaranteed
- **Polarity:** Color band denotes cathode end
- **Mounting position:** Any

Absolute Maximum Ratings and Characteristics


Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbols	LLUF4001G	LLUF4002G	LLUF4003G	LLUF4004G	LLUF4005G	LLUF4006G	LLUF4007G	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current 0.375"(9.5mm) Lead Length at T _A = 55 °C	I _{F(AV)}	1							A
Peak Forward Surge Current, 8.3 ms Single Half-sine -wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}	30							A
Maximum Forward Voltage at 1 A DC	V _F	1				1.7			V
Maximum Reverse Current T _A = 25 °C at Rated DC Blocking Voltage T _A = 100 °C	I _R	5 500							μA
Typical Junction Capacitance ¹⁾	C _J	17							pF
Typical Thermal Resistance ²⁾	R _{θJA}	60							°C/W
Maximum Reverse Recovery Time ³⁾	t _{rr}	50				75			ns
Operating and Storage Temperature Range	T _J , T _{stg}	-55 to +150							°C

¹⁾ Measured at 1 MHz and applied reverse voltage of 4 V DC.

²⁾ Thermal resistance junction to ambient and from junction to lead at 0.375"(9.5mm) lead length P.C.B mounted.

³⁾ Reverse recovery test conditions: $I_F = 0.5\text{ A}$, $I_R = 1\text{ A}$, $I_{rr} = 0.25\text{ A}$.



LLUF4001G THRU LLUF4007G

FIG. 1 - MAXIMUM FORWARD CURRENT DERATING CURVE

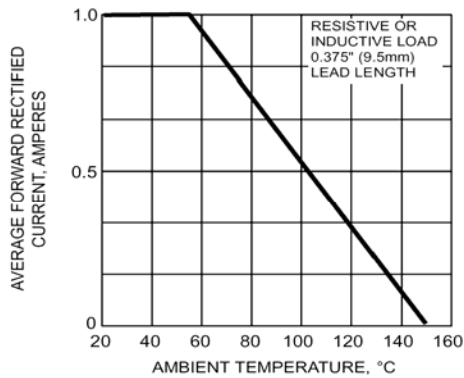


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

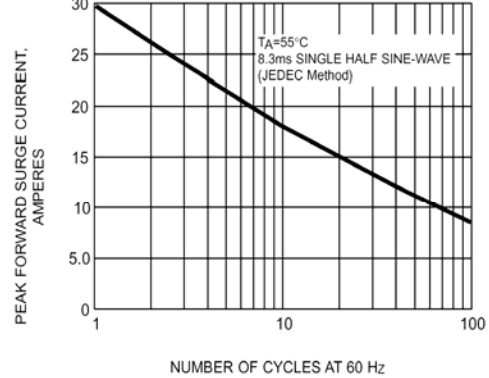


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

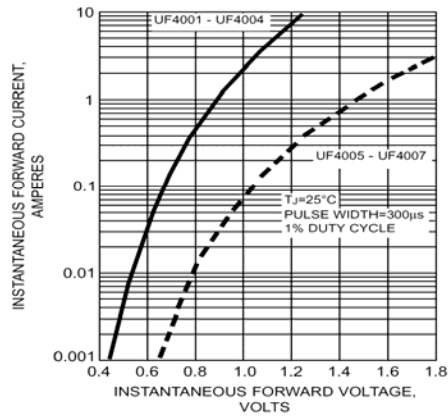


FIG. 4 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS

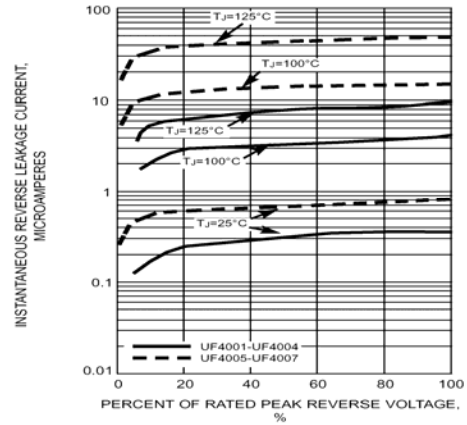


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

