

MMBT2907 / MMBT2907A-AH


PNP Silicon Epitaxial Planar Transistor

for switching and AF amplifier applications.

The transistor is subdivided into one group according to its DC current gain.

Features


- AEC-Q101 is Available
- Halogen and Antimony Free(HAF), RoHS compliant



1. Base 2. Emitter 3. Collector
TO-236 Plastic Package

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)


Parameter	Symbol	Value	Unit
Collector Base Voltage	$-V_{\text{CBO}}$	60	V
Collector Emitter Voltage	$-V_{\text{CEO}}$	40 60	V
Emitter Base Voltage	$-V_{\text{EBO}}$	5	V
Collector Current	$-I_{\text{C}}$	600	mA
Power Dissipation	P_{tot}	350	mW
Junction Temperature	T_{j}	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150	$^\circ\text{C}$











MMBT2907 / MMBT2907A-AH

Characteristics at $T_a = 25^\circ\text{C}$

Parameter		Symbol	Min.	Max.	Unit
DC Current Gain at $-I_C = 0.1\text{ mA}$, $-V_{CE} = 10\text{ V}$ at $-I_C = 1\text{ mA}$, $-V_{CE} = 10\text{ V}$ at $-I_C = 10\text{ mA}$, $-V_{CE} = 10\text{ V}$ at $-I_C = 150\text{ mA}$, $-V_{CE} = 10\text{ V}$ at $-I_C = 500\text{ mA}$, $-V_{CE} = 10\text{ V}$	MMBT2907	h_{FE}	35	-	-
	MMBT2907A	h_{FE}	75	-	-
	MMBT2907	h_{FE}	50	-	-
	MMBT2907A	h_{FE}	100	-	-
	MMBT2907	h_{FE}	75	-	-
	MMBT2907A	h_{FE}	100	-	-
	MMBT2907	h_{FE}	100	300	-
	MMBT2907	h_{FE}	30	-	-
	MMBT2907A	h_{FE}	50	-	-
	MMBT2907A	h_{FE}	50	-	-
Collector Base Cutoff Current at $-V_{CB} = 50\text{ V}$	MMBT2907	$-I_{CBO}$	-	20	nA
	MMBT2907A	$-I_{CBO}$	-	10	nA
Collector Base Breakdown Voltage at $-I_C = 10\text{ }\mu\text{A}$		$-V_{(BR)CBO}$	60	-	V
Collector Emitter Breakdown Voltage at $-I_C = 10\text{ mA}$	MMBT2907	$-V_{(BR)CEO}$	40	-	V
	MMBT2907A	$-V_{(BR)CEO}$	60	-	V
Emitter Base Breakdown Voltage at $-I_E = 10\text{ }\mu\text{A}$		$-V_{(BR)EBO}$	5	-	V
Collector Emitter Saturation Voltage at $-I_C = 150\text{ mA}$, $-I_B = 15\text{ mA}$ at $-I_C = 500\text{ mA}$, $-I_B = 50\text{ mA}$		$-V_{CE(sat)}$	-	0.4	V
		$-V_{CE(sat)}$	-	1.6	V
Base Emitter Saturation Voltage at $-I_C = 150\text{ mA}$, $-I_B = 15\text{ mA}$ at $-I_C = 500\text{ mA}$, $-I_B = 50\text{ mA}$		$-V_{BE(sat)}$	-	1.3	V
		$-V_{BE(sat)}$	-	2.6	V
Gain Bandwidth Product at $-I_C = 50\text{ mA}$, $-V_{CE} = 20\text{ V}$, $f = 100\text{ MHz}$		f_T	200	-	MHz
Collector Output Capacitance at $-V_{CB} = 10\text{ V}$, $f = 1\text{ MHz}$		C_{ob}	-	8	pF
Turn-on Time at $-V_{CC} = 30\text{ V}$, $-I_C = 150\text{ mA}$, $-I_{B1} = 15\text{ mA}$		t_{on}	-	45	ns
Delay Time at $-V_{CC} = 30\text{ V}$, $-I_C = 150\text{ mA}$, $-I_{B1} = 15\text{ mA}$		t_d	-	10	ns
Rise Time at $-V_{CC} = 30\text{ V}$, $-I_C = 150\text{ mA}$, $-I_{B1} = 15\text{ mA}$		t_r	-	40	ns
Turn-off Time at $-V_{CC} = 6\text{ V}$, $-I_C = 150\text{ mA}$, $-I_{B1} = -I_{B2} = 15\text{ mA}$		t_{off}	-	100	ns
Storage Time at $-V_{CC} = 6\text{ V}$, $-I_C = 150\text{ mA}$, $-I_{B1} = -I_{B2} = 15\text{ mA}$		t_s	-	80	ns
Fall Time at $-V_{CC} = 6\text{ V}$, $-I_C = 150\text{ mA}$, $-I_{B1} = -I_{B2} = 15\text{ mA}$		t_f	-	30	ns



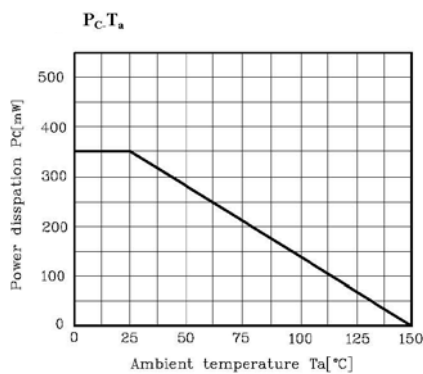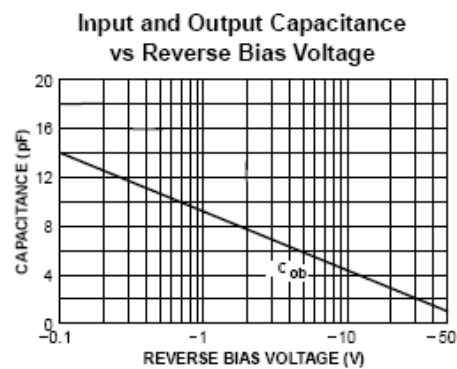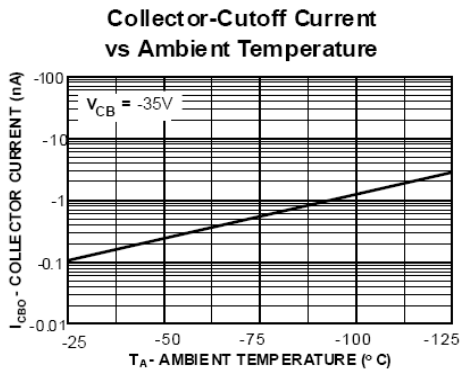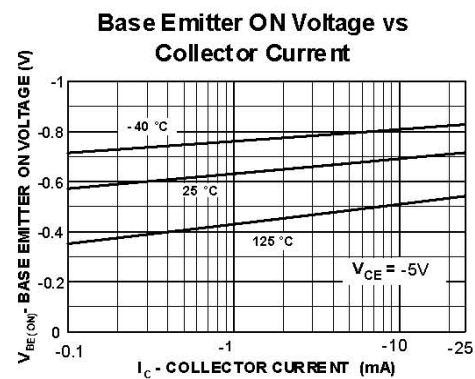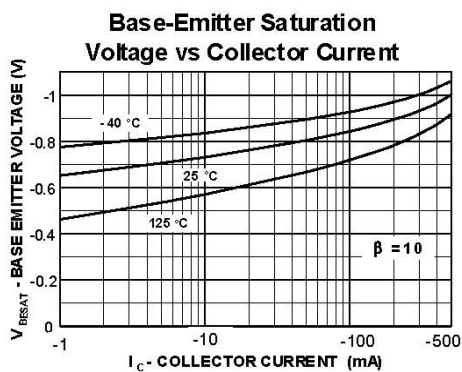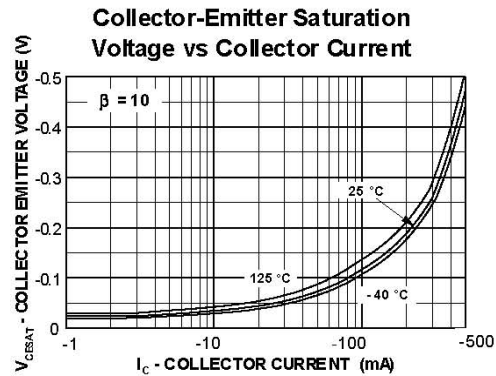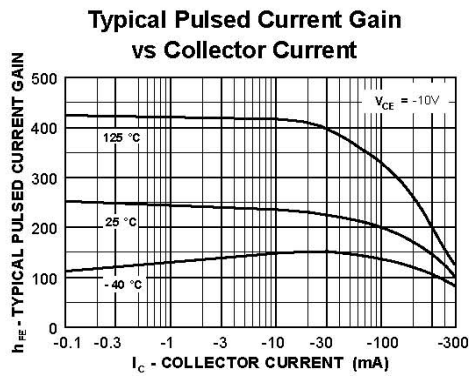


MMBT2907 / MMBT2907A-AH


PACKAGE OUTLINE

Plastic surface mounted package (Dimensions in mm)

TO-236

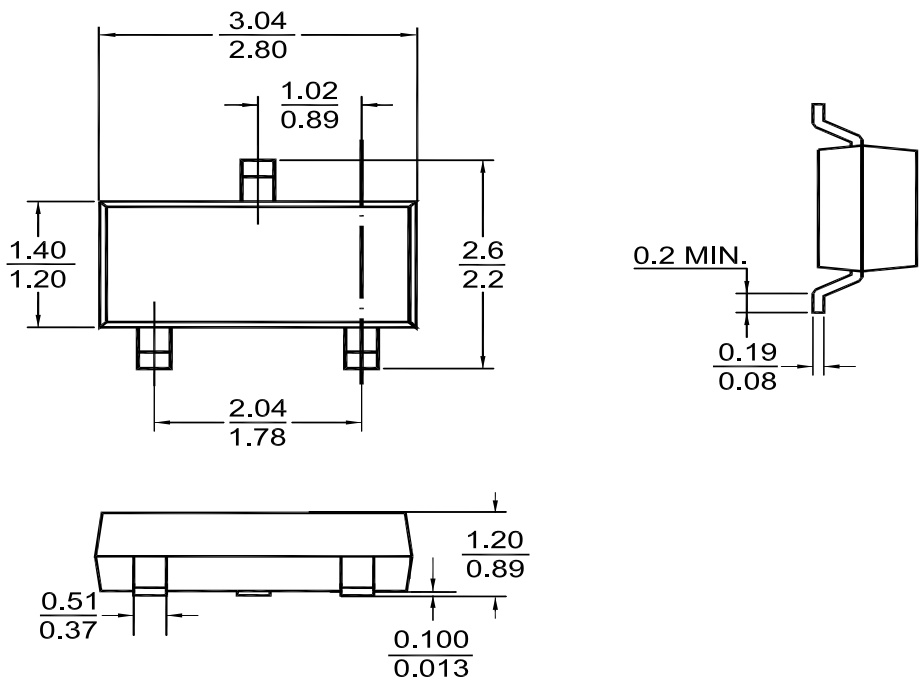

Recommended Soldering Footprint

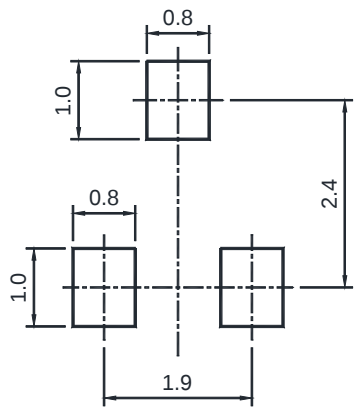

Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
TO-236	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000

