

MMBT2907 / MMBT2907A-HAF


PNP Silicon Epitaxial Planar Transistor

for switching and AF amplifier applications.

The transistor is subdivided into one group according to its DC current gain.

Features

- Halogen and Antimony Free(HAF),
RoHS compliant



1. Base 2. Emitter 3. Collector
TO-236 Plastic Package


Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Collector Base Voltage	$-V_{\text{CBO}}$	60	V
Collector Emitter Voltage	$-V_{\text{CEO}}$	40 60	V
Emitter Base Voltage	$-V_{\text{EBO}}$	5	V
Collector Current	$-I_{\text{C}}$	600	mA
Power Dissipation	P_{tot}	350	mW
Junction Temperature	T_{j}	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150	$^\circ\text{C}$

Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal Resistance from Junction to Ambient ¹⁾	$R_{\theta\text{JA}}$	357	$^\circ\text{C/W}$


¹⁾ Device mounted on FR-4 substrate PC board, with minimum recommended pad layout.



MMBT2907 / MMBT2907A-HAF

Characteristics at $T_a = 25^\circ\text{C}$

Parameter		Symbol	Min.	Max.	Unit
DC Current Gain at $-I_C = 0.1\text{ mA}$, $-V_{CE} = 10\text{ V}$ at $-I_C = 1\text{ mA}$, $-V_{CE} = 10\text{ V}$ at $-I_C = 10\text{ mA}$, $-V_{CE} = 10\text{ V}$ at $-I_C = 150\text{ mA}$, $-V_{CE} = 10\text{ V}$ at $-I_C = 500\text{ mA}$, $-V_{CE} = 10\text{ V}$	MMBT2907	h_{FE}	35	-	-
	MMBT2907A	h_{FE}	75	-	-
	MMBT2907	h_{FE}	50	-	-
	MMBT2907A	h_{FE}	100	-	-
	MMBT2907	h_{FE}	75	-	-
	MMBT2907A	h_{FE}	100	-	-
	MMBT2907/A	h_{FE}	100	300	-
	MMBT2907	h_{FE}	30	-	-
	MMBT2907A	h_{FE}	50	-	-
Collector Base Cutoff Current at $-V_{CB} = 50\text{ V}$	MMBT2907	$-I_{CBO}$	-	20	nA
	MMBT2907A	$-I_{CBO}$	-	10	nA
Collector Base Breakdown Voltage at $-I_C = 10\text{ }\mu\text{A}$		$-V_{(BR)CBO}$	60	-	V
Collector Emitter Breakdown Voltage at $-I_C = 10\text{ mA}$	MMBT2907	$-V_{(BR)CEO}$	40	-	V
	MMBT2907A	$-V_{(BR)CEO}$	60	-	V
Emitter Base Breakdown Voltage at $-I_E = 10\text{ }\mu\text{A}$		$-V_{(BR)EBO}$	5	-	V
Collector Emitter Saturation Voltage at $-I_C = 150\text{ mA}$, $-I_B = 15\text{ mA}$ at $-I_C = 500\text{ mA}$, $-I_B = 50\text{ mA}$		$-V_{CE(sat)}$	-	0.4	V
		$-V_{CE(sat)}$	-	1.6	V
Base Emitter Saturation Voltage at $-I_C = 150\text{ mA}$, $-I_B = 15\text{ mA}$ at $-I_C = 500\text{ mA}$, $-I_B = 50\text{ mA}$		$-V_{BE(sat)}$	-	1.3	V
		$-V_{BE(sat)}$	-	2.6	V
Gain Bandwidth Product at $-I_C = 50\text{ mA}$, $-V_{CE} = 20\text{ V}$, $f = 100\text{ MHz}$		f_T	200	-	MHz
Collector Output Capacitance at $-V_{CB} = 10\text{ V}$, $f = 1\text{ MHz}$		C_{ob}	-	8	pF
Turn-on Time at $-V_{CC} = 30\text{ V}$, $-I_C = 150\text{ mA}$, $-I_{B1} = 15\text{ mA}$		t_{on}	-	45	ns
Delay Time at $-V_{CC} = 30\text{ V}$, $-I_C = 150\text{ mA}$, $-I_{B1} = 15\text{ mA}$		t_d	-	10	ns
Rise Time at $-V_{CC} = 30\text{ V}$, $-I_C = 150\text{ mA}$, $-I_{B1} = 15\text{ mA}$		t_r	-	40	ns
Turn-off Time at $-V_{CC} = 6\text{ V}$, $-I_C = 150\text{ mA}$, $-I_{B1} = -I_{B2} = 15\text{ mA}$		t_{off}	-	100	ns
Storage Time at $-V_{CC} = 6\text{ V}$, $-I_C = 150\text{ mA}$, $-I_{B1} = -I_{B2} = 15\text{ mA}$		t_s	-	80	ns
Fall Time at $-V_{CC} = 6\text{ V}$, $-I_C = 150\text{ mA}$, $-I_{B1} = -I_{B2} = 15\text{ mA}$		t_f	-	30	ns



Electrical Characteristics Curves

Fig. 1 Output Characteristics Curve

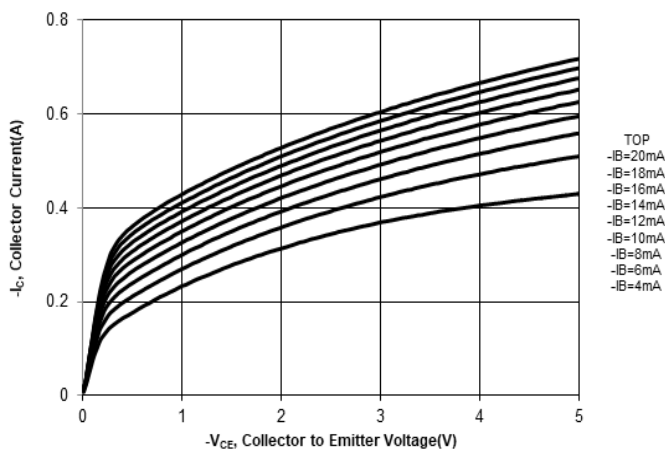


Fig. 2 Output Characteristics Curve

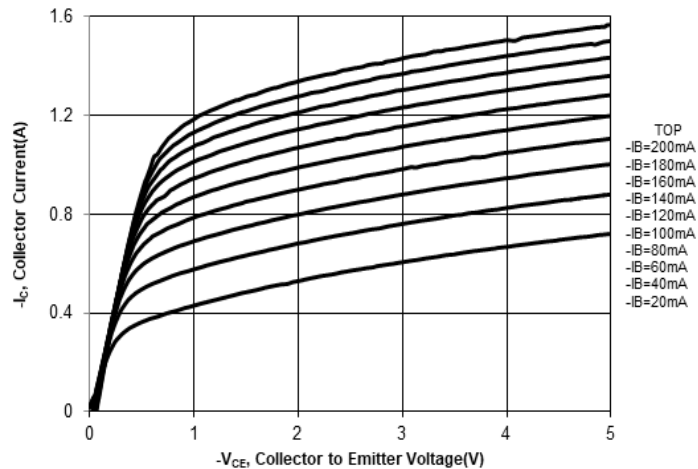


Fig. 3 Collector Current vs. Base-Emitter Voltage



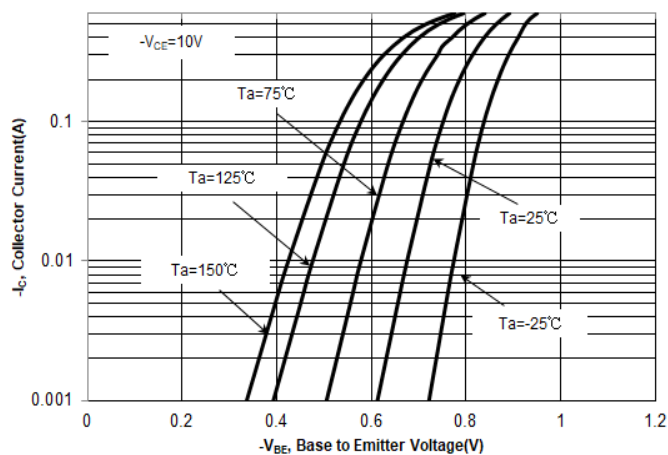


Fig. 4 $h_{FE,DC}$ Current Gain vs. Collector Current

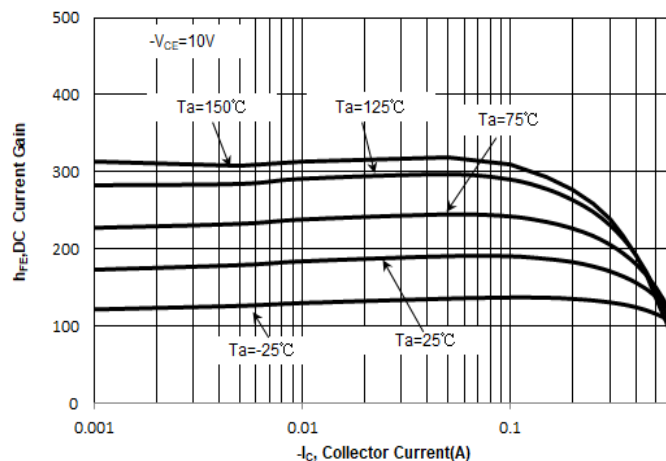

Electrical Characteristics Curves

Fig. 5 $V_{BE(sat)}$ vs. Collector Current

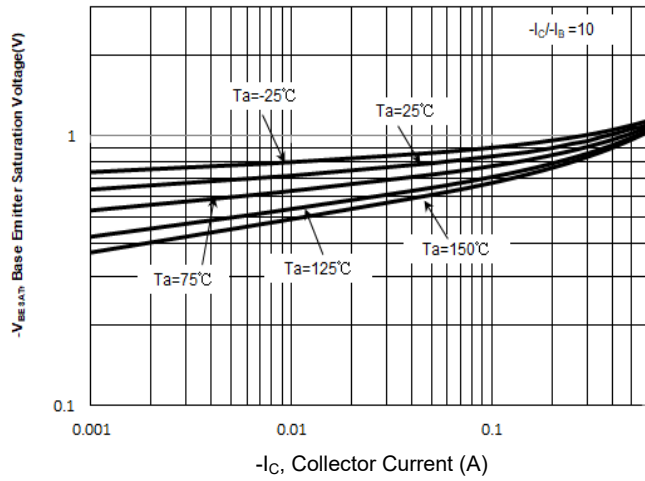


Fig. 6 $V_{CE(sat)}$ vs. Collector Current

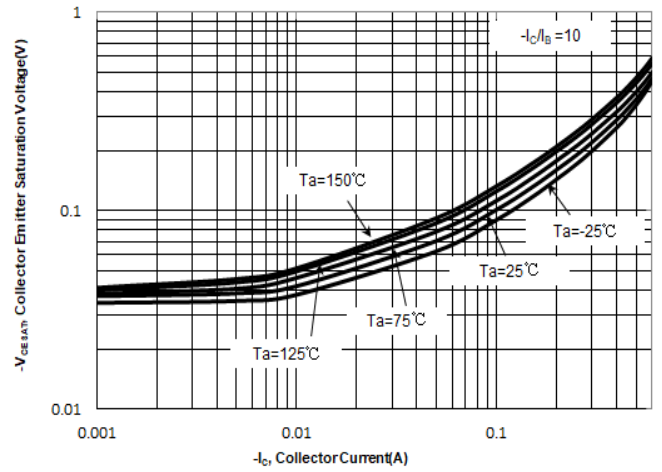


Fig. 7 Capacitance



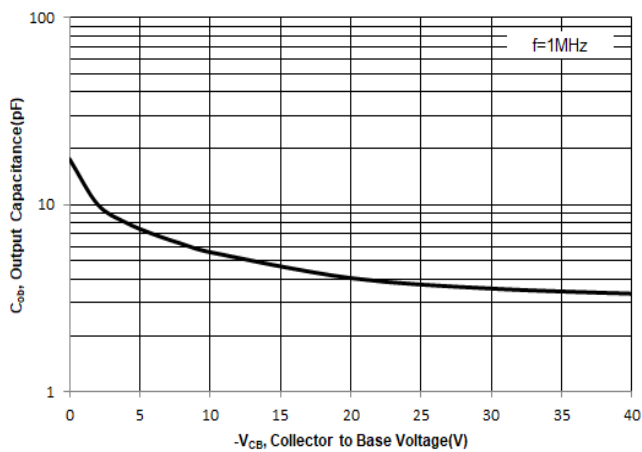



Fig. 8. Power Derating Curve

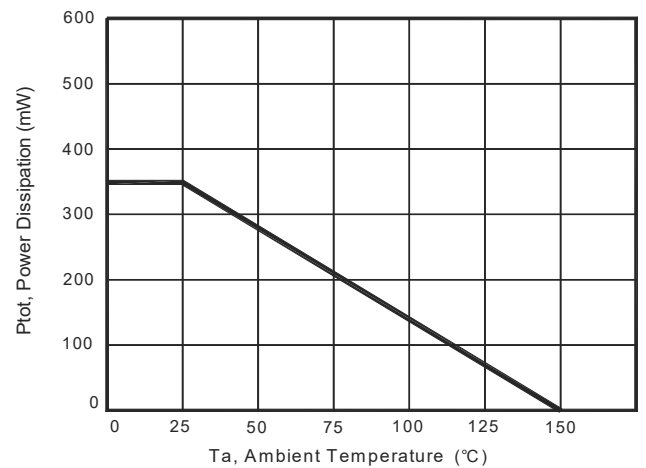

MMBT2907 / MMBT2907A-HAF


Package Outline (Dimensions in mm)

TO-236

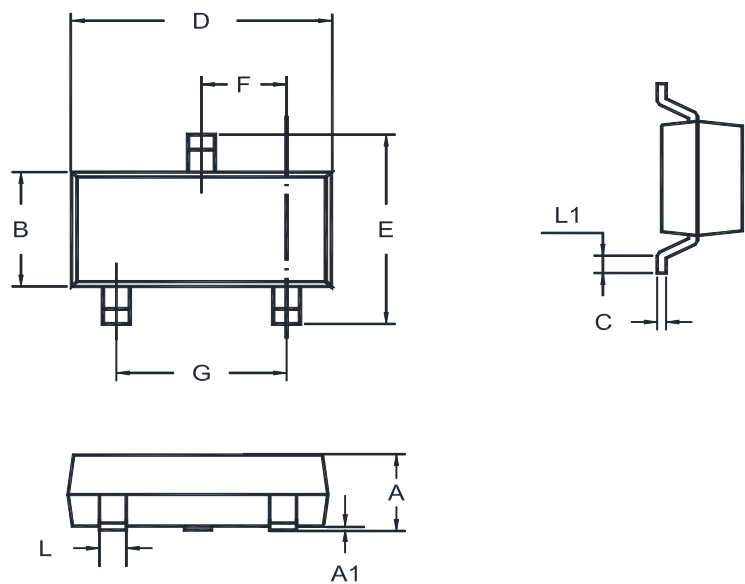

Unit	A	A1	B	C	D	E	F	G	L	L1
mm	1.20 0.89	0.100 0.013	1.40 1.20	0.19 0.08	3.04 2.80	2.6 2.2	1.02 0.89	2.04 1.78	0.51 0.37	0.2 MIN

Recommended Soldering Footprint

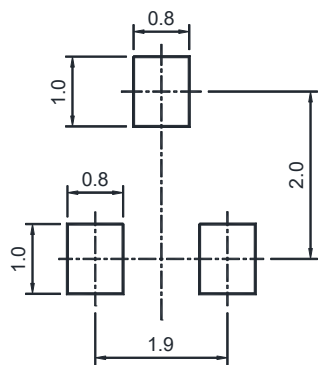

Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
TO-236	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000

Marking information

" 2F " = Part No.
" • " = HAF (Halogen and Antimony Free)
"YM" = Date Code Marking
"Y" = Year
"M" = Month
Font type: Arial

