


MMBT624

PNP Silicon Epitaxial Planar Transistor

For use in small type equipments, especially recommended or hybrid circuit and other applications

The transistor is subdivided into five groups A, B, C, D and E, according to its DC current gain.




1.BASE 2.EMITTER 3.COLLECTOR
TO-236 Plastic Package

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Collector Base Voltage	$-V_{CBO}$	30	V
Collector Emitter Voltage	$-V_{CEO}$	25	V
Emitter Base Voltage	$-V_{EBO}$	5	V
Collector Current	$-I_C$	700	mA
Power Dissipation	P_{tot}	200	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{Stg}	- 55 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit	
DC Current Gain at -V _{CE} = 1 V, -I _C = 100 mA	A	h _{FE}	110	-	180	-
	B	h _{FE}	135	-	220	-
	C	h _{FE}	170	-	270	-
	D	h _{FE}	200	-	320	-
	E	h _{FE}	250	-	400	-
	at -V _{CE} = 1 V, -I _C = 700 mA	h _{FE}	50	-	-	-
Collector Base Cutoff Current at -V _{CB} = 30 V	-I _{CBO}	-	-	100	nA	
Emitter Base Cutoff Current at -V _{EB} = 5 V	-I _{EBO}	-	-	100	nA	
Collector Base Breakdown Voltage at -I _C = 100 μA	-V _{(BR)CBO}	30	-	-	V	
Collector Emitter Breakdown Voltage at -I _C = 1 mA	-V _{(BR)CEO}	25	-	-	V	
Emitter Base Breakdown Voltage at -I _E = 100 μA	-V _{(BR)EBO}	5	-	-	V	
Collector Emitter Saturation Voltage at -I _C = 700 mA, -I _B = 70 mA	-V _{CE(sat)}	-	-	0.6	V	
Base Emitter On Voltage at -V _{CE} = 6 V , -I _C = 10 mA	-V _{BE(on)}	0.6	-	0.7	V	
Output Capacitance at -V _{CB} = 6 V, I _E = 0, f = 1 MHz	C _{ob}	-	17	-	pF	
Transition Frequency at -V _{CE} = 6 V, -I _C = 10 mA	f _T	-	160	-	MHz	



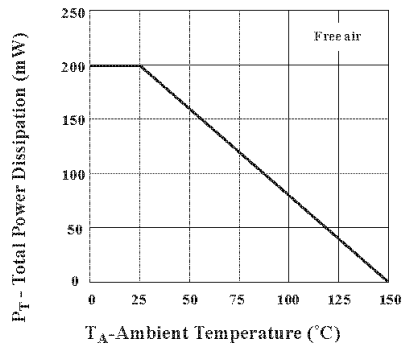


Fig.1 TOTAL POWER DISSIPATION VS. AMBIENT TEMPERATURE

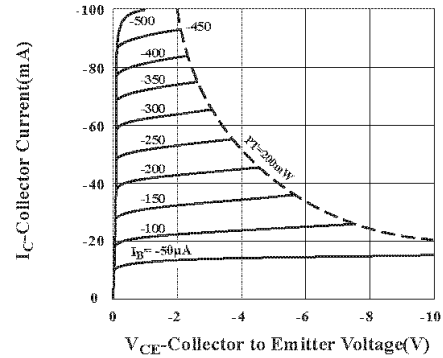


Fig.2 COLLECTOR CURRENT VS. COLLECTOR TO EMITTER VOLTAGE

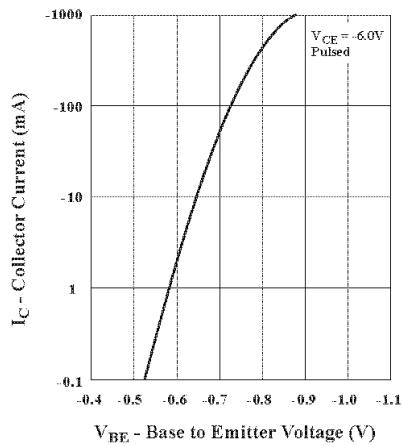


Fig.3 COLLECTOR CURRENT VS. BASE TO EMITTER VOLTAGE

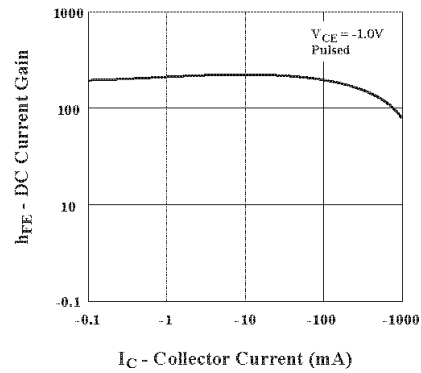


Fig.4 DC CURRENT GAIN VS. COLLECTOR CURRENT

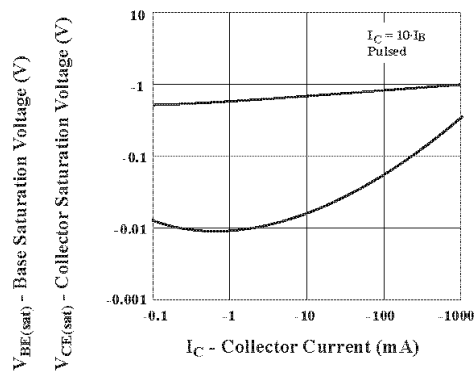


Fig.5 BASE AND COLLECTOR SATURATION VOLTAGE VS. COLLECTOR CURRENT

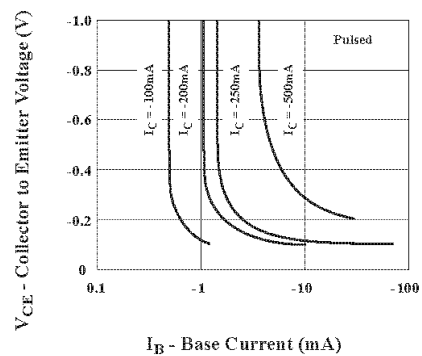


Fig.6 COLLECTOR TO EMITTER VOLTAGE VS. BASE CURRENT

