

# RS1A THRU RS1M

## SURFACE MOUNT FAST RECOVERY RECTIFIERS

Reverse Voltage - 50 to 1000 V


Forward Current - 1 A

### Features

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- Fast reverse recovery time

### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

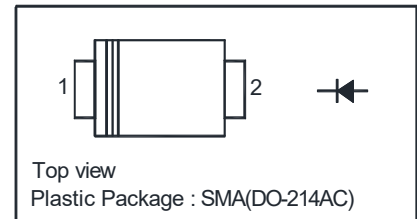

### Mechanical Data

- **Case:** SMA (DO-214AC) molded plastic
- **Terminals:** Solderable per MIL-STD-750, Method 2026

### Absolute Maximum Ratings and Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbols	RS1A	RS1B	RS1D	RS1G	RS1J	RS1K	RS1M	Units
	Marking	RS1A	RS1B	RS1D	RS1G	RS1J	RS1K	RS1M	
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Current at $T_C = 125^\circ\text{C}$	$I_{F(AV)}$	1							A
Peak Forward Surge Current 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	30							A
Maximum Forward Voltage at $I_F = 1\text{A}$	$V_F$	1.3							V
Maximum DC Reverse Current at $T_a = 25^\circ\text{C}$ at Rated DC Blocking Voltage at $T_a = 125^\circ\text{C}$	$I_R$	5 50							$\mu\text{A}$
Maximum Reverse Recovery Time <sup>1)</sup>	$t_{rr}$	150				250	500		ns
Typical Junction Capacitance at $V_R = 4\text{V}$ , $f = 1\text{MHz}$	$C_j$	15							pF
Typical Thermal Resistance <sup>2)</sup>	$R_{\theta JA}$	75							$^\circ\text{C/W}$
Operating and Storage Temperature Range	$T_j, T_{stg}$	- 55 to + 150							$^\circ\text{C}$

<sup>1)</sup> Measured with  $I_F = 0.5\text{A}$ ,  $I_R = 1\text{A}$ ,  $I_{rr} = 0.25\text{A}$ .

<sup>2)</sup> P.C.B. mounted with 1.0 X 1.0" (2.54 X 2.54 cm) copper pad areas.




Fig.1 Forward Current Derating Curve

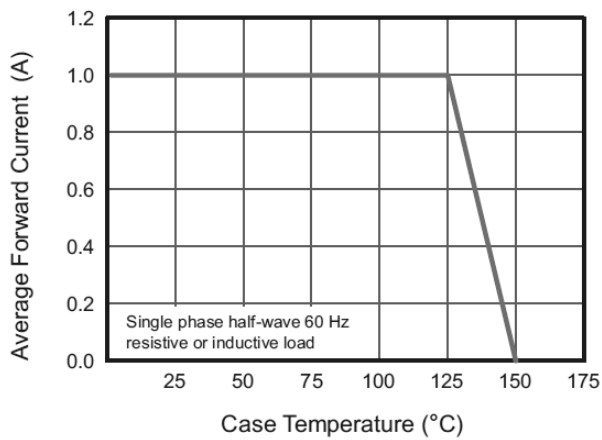


Fig.2 Typical Reverse Characteristics

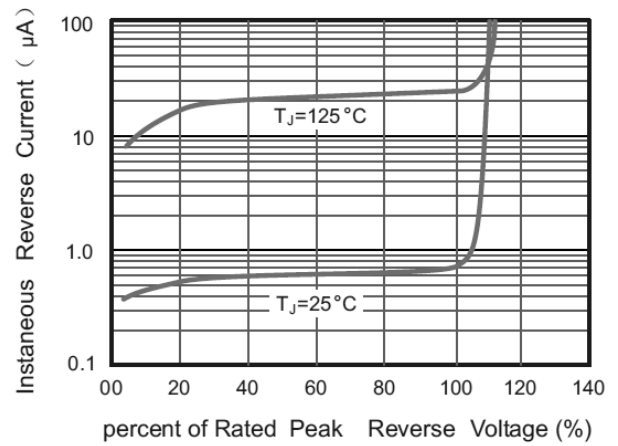


Fig.3 Typical Instantaneous Forward Characteristics

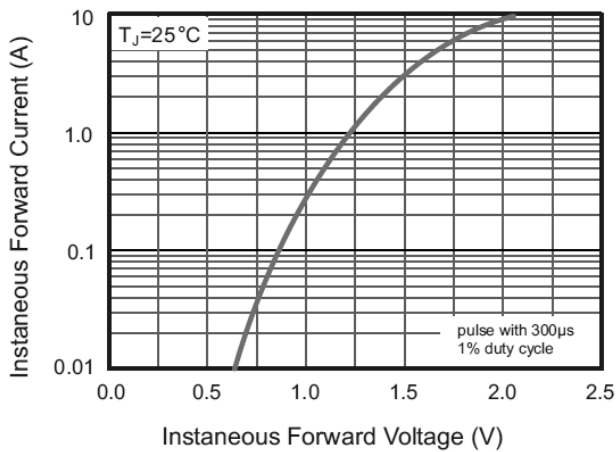


Fig.4 Typical Junction Capacitance



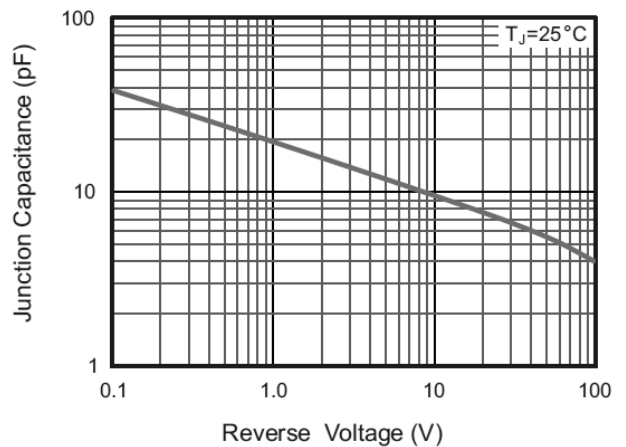



Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

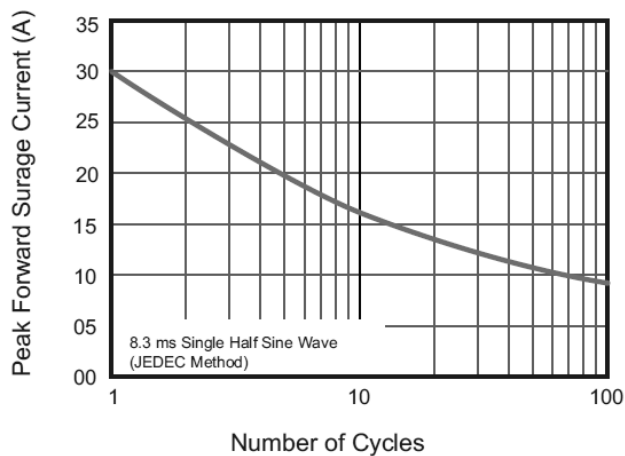

# RS1A THRU RS1M

Package Outline Dimensions in inches (millimeters)

SMA(DO-214AC)

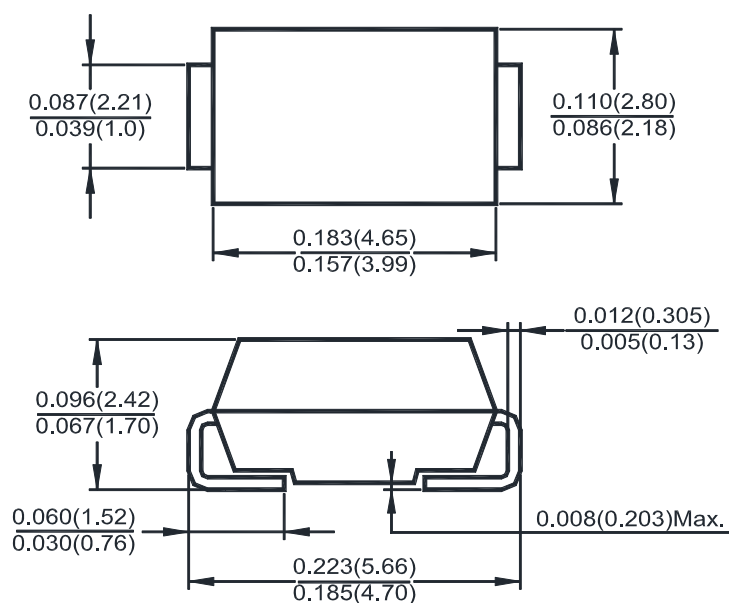

## Marking information

" XXXX " = Part No.

" III " = Cathode line

Font type: Arial

