

SS52B THRU SS520B

Schottky Barrier Rectifier


Reverse Voltage - 20 to 200 V
Forward Current - 5 A

Features

- Plastic package has Underwriters Laboratory Flammability classification 94V-0
- Metal silicon junction with guard ring
- Low forward voltage
- High current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

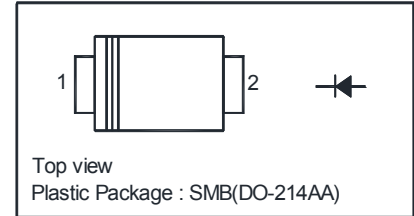

Mechanical Data

- **Case:** SMB (DO-214AA) molded plastic body
- **Polarity:** color band denotes cathode end

Maximum Ratings and Electrical Characteristics


Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, resistive or inductive load.

For capacitive load, derate by 20 %.

Parameter	Symbols	SS52B	SS53B	SS54B	SS55B	SS56B	SS58B	SS510B	SS515B	SS520B	Units
	Marking	SS52B	SS53B	SS54B	SS55B	SS56B	SS58B	SS510B	SS515B	SS520B	-
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	80	100	150	200	V
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	56	70	105	140	V
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	80	100	150	200	V
Maximum Average Forward Rectified Current	I _{F(AV)}	5									A
Peak Forward Surge Current, 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I _{FSM}	150									A
Maximum Forward Voltage at 5 A	V _F	0.55			0.7		0.85		0.9		V
Maximum DC Reverse Current at Rated DC Blocking Voltage T _a = 25°C T _a = 100°C	I _R	1 50									mA
Typical Junction Capacitance ¹⁾	C _J	500			300						pF
Typical Thermal Resistance, to Ambient ²⁾	R _{θJA}	50									°C/W
Junction Temperature Range	T _j	- 55 to + 125			- 55 to + 150						°C
Storage Temperature Range	T _{stg}	- 55 to + 150									°C

¹⁾ Measured at 1MHz and applied reverse voltage of 4 V D.C.

²⁾ P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.



SS52B THRU SS520B

Electrical characteristic curves

Fig.1 Forward Current Derating Curve

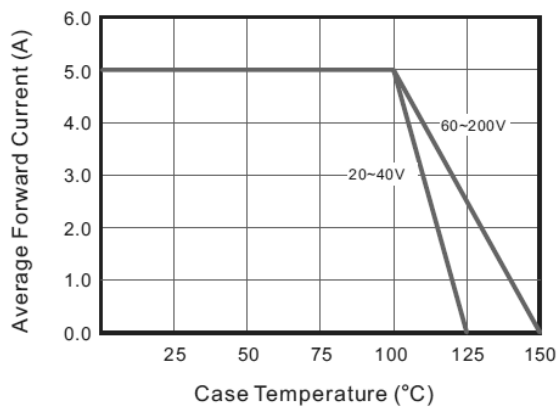


Fig.2 Typical Reverse Characteristics

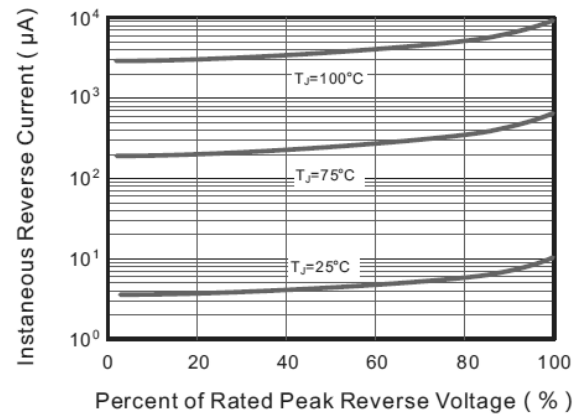


Fig.3 Typical Forward Characteristic

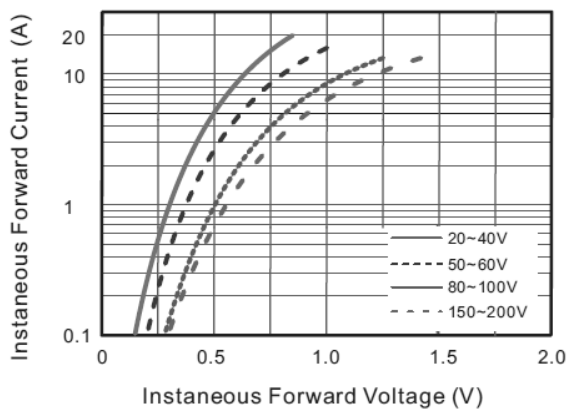


Fig.4 Typical Junction Capacitance

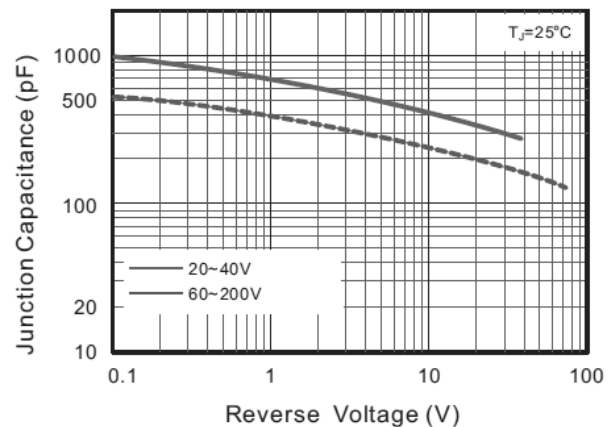


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current



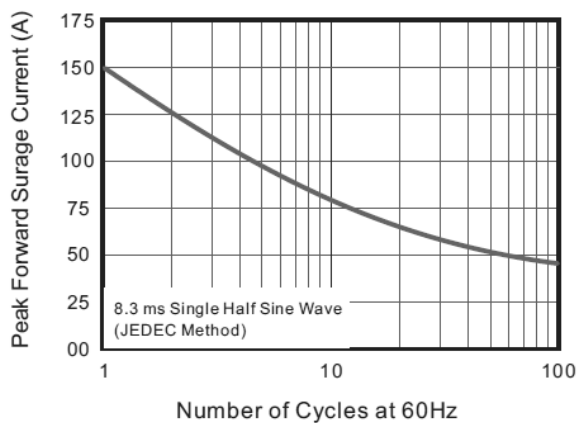



Fig.6- Typical Transient Thermal Impedance

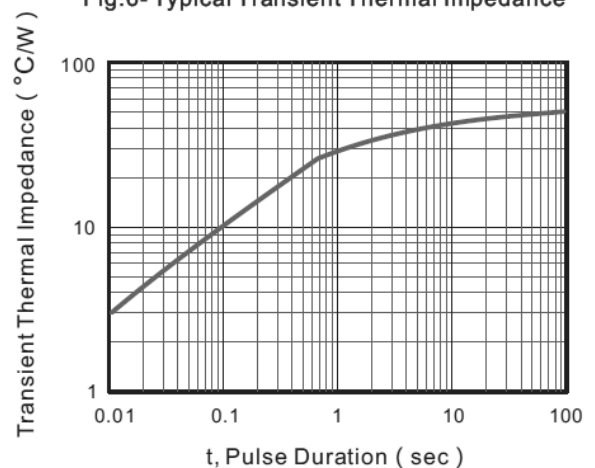

SS52B THRU SS520B

Package Outline Dimensions in inches (millimeters)

SMB(DO-214AA)

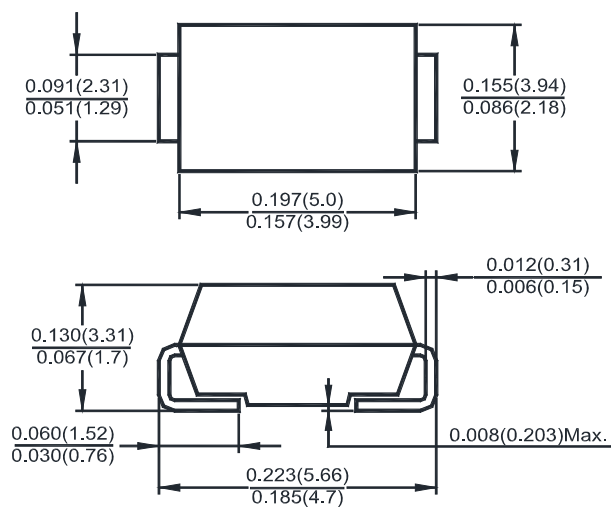

Marking information

" ***** " = Part No.

" III " = Cathode line

Font type: Arial

