

UF5400G THRU UF5408G

Ultra Fast Glass Passivated Rectifier

Reverse Voltage - 50 to 1000 V

Forward Current - 3 A


Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Ultrafast recovery time for high efficiency
- High forward surge current capability
- Low reverse leakage

Mechanical Data

- **Case:** Molded plastic body, JEDEC DO-201AD
- **Terminals:** Plated Axial leads, solderable per MIL-STD-750, method 2026
- **Polarity:** Color band denotes cathode end.
- **Mounting Position:** Any

DO-201AD

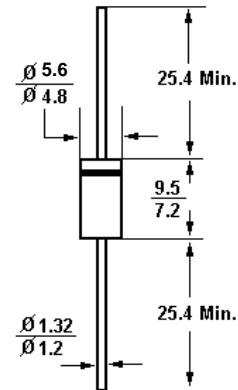

Dimnsions in mm


Absolute Maximum Ratings and Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbols	UF5400G	UF5401G	UF5402G	UF5403G	UF5404G	UF5406G	UF5407G	UF5408G	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	300	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	210	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	300	400	600	800	1000	V
Maximum Average Forward Rectified Current 0.375" (9.5mm) Lead Length at Ta = 55 °C	I _{F(AV)}	3								A
Peak Forward Surge Current 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}	125								A
Maximum Instantaneous Forward Voltage at 3 A	V _F	1				1.25	1.7			V
Maximum Reverse Current Ta = 25 °C at Rated Reverse Voltage Ta = 100 °C	I _R	5 150								μA
Maximum Reverse Recovery Time ¹⁾	t _{rr}	50					75			ns
Typical Junction Capacitance ²⁾	C _j	75								pF
Operating Junction Temperature Range	T _j	- 65 to + 150								°C
Storage Temperature Range	T _{stg}	- 65 to + 150								°C

¹⁾ Reverse recovery condition $I_F = 0.5\text{ A}$, $I_R = 1\text{ A}$, $t_{rr} = 0.25\text{ A}$.


²⁾ Measured at 1 MHz and applied reverse voltage of 4 V D.C.



UF5400G THRU UF5408G

AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

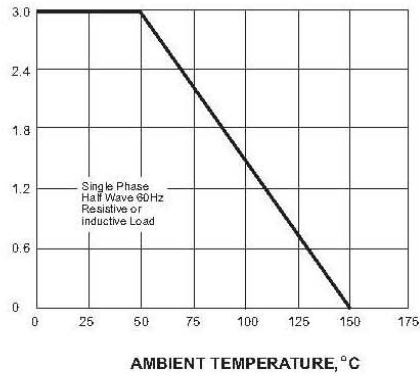

PEAK FORWARD SURGE CURRENT,
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT


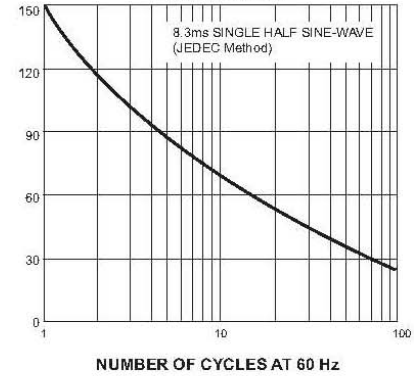


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

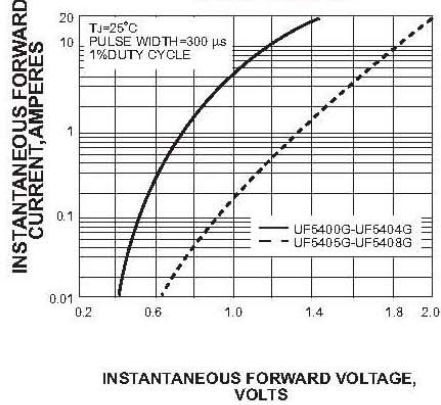

INSTANTANEOUS REVERSE CURRENT,
MICROAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS


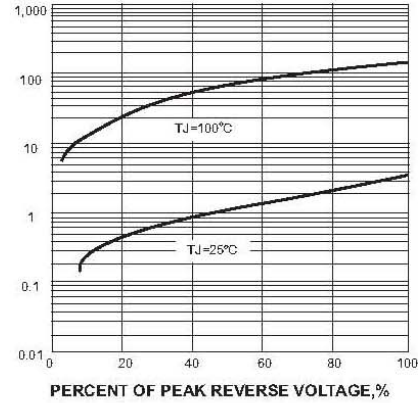


FIG. 5-TYPICAL JUNCTION CAPACITANCE



TRANSIENT THERMAL IMPEDANCE,
°C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

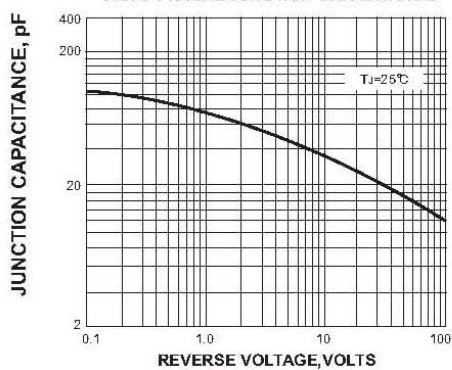