


UG2A THRU UG2D

SUPER FAST RECTIFIERS Reverse Voltage - 50 to 200 V Forward Current - 2.0 A

Features

- Super fast switching for high efficiency
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
250°C/10 seconds, 0.375"(9.5mm) lead length,
5 lbs (2.3kg) tension

DO-15

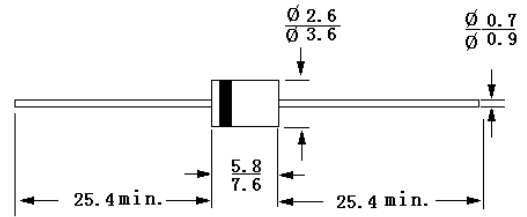

Dimensions in mm

Mechanical Data

- **Case:** Molded plastic, JEDEC DO-15
- **Lead:** Plated axial leads, solderable per MIL-STD-750, method 2026 guaranteed
- **Polarity:** color band denotes cathode end
- **Mounting position:** Any
- **Weight:** 0.014 ounce, 0.4 gram

Maximum Ratings and Electrical Characteristics


Rating at 25°C ambient temperature unless otherwise specified. Single-phase, half wave, 60Hz, resistive or inductive load, for current capacitive load current derate by 20%.

	Symbols	UG2A	UG2B	UG2C	UG2D	Units
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	150	200	V
Maximum RMS voltage	V_{RMS}	35	70	105	140	V
Maximum DC blocking voltage	V_{DC}	50	100	150	200	V
Maximum average forward rectified current .375"(9.5mm)lead length at $T_A = 55^{\circ}C$	$I_{(AV)}$	2.0				A
Peak forward surge current , 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	80.0				A
Maximum instantaneous forward voltage @ 2.0A	V_F	0.95				V
Maximum DC reverse current @ $T_A = 25^{\circ}C$ at rated DC blocking voltage @ $T_A = 100^{\circ}C$	I_R I_R	5.0 50.0				uA uA
Maximum reverse recovery time (Note 1)	T_{rr}	35				nS
Typical junction capacitance (Note 2)	C_J	15.0				pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	15.0				$^{\circ}C/W$
Operating temperature range	T_J	-65 to +150				$^{\circ}C$
Storage temperature range	T_{Stg}	-65 to +150				$^{\circ}C$

Note: 1. Reverse recovery test conditions: $I_F = 0.5A$, $I_R = 1.0A$, $I_{rr} = 0.25A$.

2. Measured at 1 MHz and applied reverse voltage of 4.0 Volts D.C.

3. Thermal Resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted.



Dated: 22/07/2004

UG2A THRU UG2D

FIG.1-FORWARD CURRENT DERATING CURVE

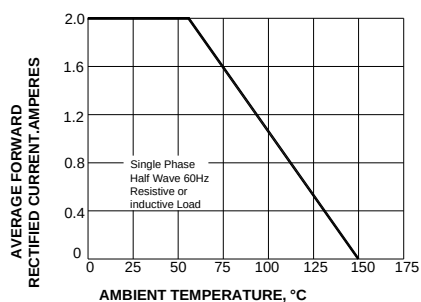


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

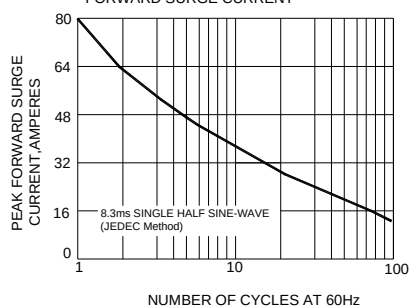


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

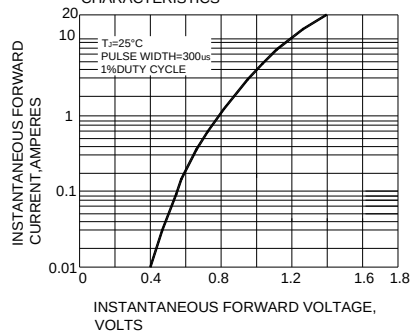


FIG.4-TYPICAL REVERSE CHARACTERISTICS

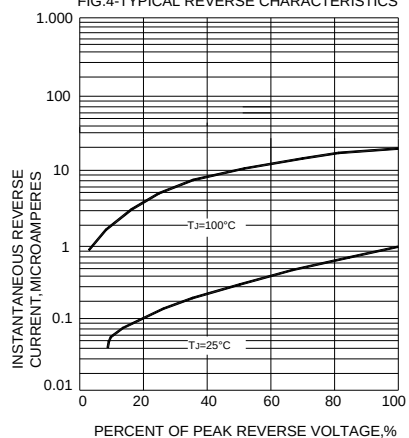


FIG.5-TYPICAL JUNCTION CAPACITANCE

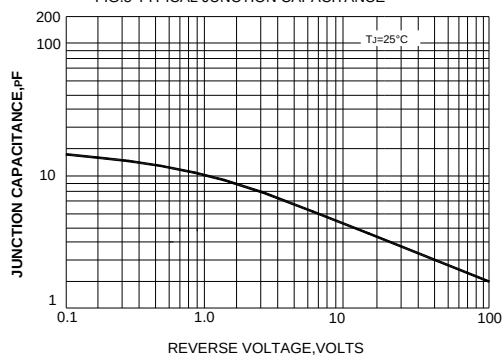


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

