

# WTM303N095LS-AH

## N-Channel Enhancement Mode MOSFET

### Features


- AEC-Q101 Qualified
- Low  $R_{DS(ON)}$
- Low Input Capacitance
- Low Input/Output Leakage
- Halogen and Antimony Free(HAF), RoHS compliant

### Application

- Motor/Body Load Control
- Load Switch
- DC-DC converters and Off-line UPS

### Key Parameters

| Parameter        | Value                        | Unit       |
|------------------|------------------------------|------------|
| $BV_{DSS}$       | 30                           | V          |
| $R_{DS(ON)}$ Max | 7 @ $V_{GS} = 10\text{ V}$   | m $\Omega$ |
|                  | 11 @ $V_{GS} = 4.5\text{ V}$ | m $\Omega$ |
| $V_{GS(th)}$ typ | 1.6                          | V          |
| $Q_g$ typ        | 24 @ $V_{GS} = 10\text{ V}$  | nC         |

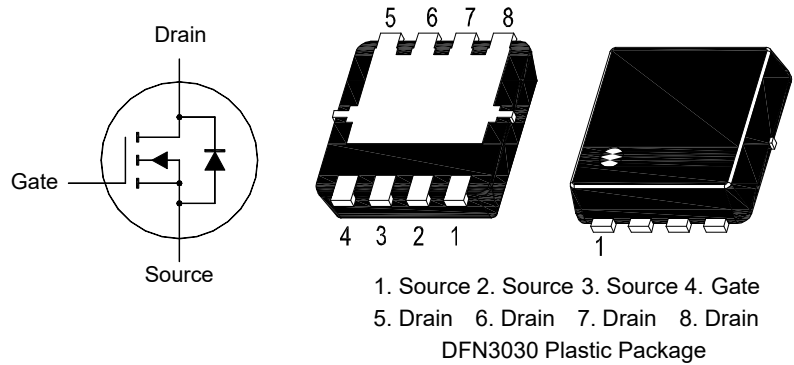

### Absolute Maximum Ratings (at $T_a = 25^\circ\text{C}$ unless otherwise specified)

| Parameter                                        | Symbol         | Value         | Unit             |
|--------------------------------------------------|----------------|---------------|------------------|
| Drain-Source Voltage                             | $V_{DS}$       | 30            | V                |
| Gate-Source Voltage                              | $V_{GS}$       | $\pm 20$      | V                |
| Continuous Drain Current                         | $I_D$          | 42            | A                |
|                                                  |                | 27            |                  |
| Peak Drain Current, Pulsed <sup>1)</sup>         | $I_{DM}$       | 120           | A                |
| Single Pulse Avalanche Current                   | $I_{AS}$       | 19            | A                |
| Single Pulse Avalanche Energy <sup>2)</sup>      | $E_{AS}$       | 18            | mJ               |
| Power Dissipation                                | $P_D$          | 25            | W                |
|                                                  |                | 10            |                  |
| Operating Junction and Storage Temperature Range | $T_J, T_{stg}$ | - 55 to + 150 | $^\circ\text{C}$ |


### Thermal Characteristics

| Parameter                                                 | Symbol          | Max. | Unit               |
|-----------------------------------------------------------|-----------------|------|--------------------|
| Thermal Resistance from Junction to Case                  | $R_{\theta JC}$ | 5    | $^\circ\text{C/W}$ |
| Thermal Resistance from Junction to Ambient <sup>3)</sup> | $R_{\theta JA}$ | 50   | $^\circ\text{C/W}$ |

<sup>1)</sup> Pulse Test: Pulse Width  $\leq 100\text{ }\mu\text{s}$ , Duty Cycle  $\leq 2\%$ , Repetitive rating, pulse width limited by junction temperature  $T_{J(MAX)} = 150^\circ\text{C}$ .

<sup>2)</sup> Limited by  $T_{J(MAX)}$ , starting  $T_J = 25^\circ\text{C}$ ,  $L = 0.1\text{ mH}$ ,  $R_g = 25\text{ }\Omega$ ,  $I_D = 19\text{ A}$ ,  $V_{GS} = 10\text{ V}$ .


<sup>3)</sup> Device mounted on FR-4 substrate PC board, 2oz copper, with 1-inch square copper plate in still air.



# WTM303N095LS-AH

Characteristics at  $T_a = 25^\circ\text{C}$  unless otherwise specified

| Parameter                                                                                                                                                                        | Symbol       | Min.   | Typ.     | Max.      | Unit          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------|----------|-----------|---------------|
| <b>STATIC PARAMETERS</b>                                                                                                                                                         |              |        |          |           |               |
| Drain-Source Breakdown Voltage<br>at $I_D = 250\ \mu\text{A}$                                                                                                                    | $BV_{DS}$    | 30     | -        | -         | V             |
| Drain-Source Leakage Current<br>at $V_{DS} = 30\ \text{V}$                                                                                                                       | $I_{DSS}$    | -      | -        | 1         | $\mu\text{A}$ |
| Gate Leakage Current<br>at $V_{GS} = \pm 20\ \text{V}$                                                                                                                           | $I_{GSS}$    | -      | -        | $\pm 100$ | nA            |
| Gate-Source Threshold Voltage<br>at $V_{DS} = V_{GS}$ , $I_D = 250\ \mu\text{A}$                                                                                                 | $V_{GS(th)}$ | 1      | -        | 2.5       | V             |
| Drain-Source On-State Resistance<br>at $V_{GS} = 10\ \text{V}$ , $I_D = 15\ \text{A}$<br>at $V_{GS} = 4.5\ \text{V}$ , $I_D = 10\ \text{A}$                                      | $R_{DS(on)}$ | -<br>- | 6<br>9   | 7<br>11   | m $\Omega$    |
| <b>DYNAMIC PARAMETERS</b>                                                                                                                                                        |              |        |          |           |               |
| Forward Transconductance<br>at $V_{DS} = 5\ \text{V}$ , $I_D = 15\ \text{A}$                                                                                                     | $g_{fs}$     | -      | 15       | -         | S             |
| Gate resistance<br>at $V_{DS} = 0\ \text{V}$ , $f = 1\ \text{MHz}$                                                                                                               | $R_g$        | -      | 1.6      | -         | $\Omega$      |
| Input Capacitance<br>at $V_{GS} = 0\ \text{V}$ , $V_{DS} = 15\ \text{V}$ , $f = 1\ \text{MHz}$                                                                                   | $C_{iss}$    | -      | 1122     | -         | pF            |
| Output Capacitance<br>at $V_{GS} = 0\ \text{V}$ , $V_{DS} = 15\ \text{V}$ , $f = 1\ \text{MHz}$                                                                                  | $C_{oss}$    | -      | 140      | -         | pF            |
| Reverse Transfer Capacitance<br>at $V_{GS} = 0\ \text{V}$ , $V_{DS} = 15\ \text{V}$ , $f = 1\ \text{MHz}$                                                                        | $C_{rss}$    | -      | 105      | -         | pF            |
| Gate charge total<br>at $V_{DS} = 15\ \text{V}$ , $I_D = 15\ \text{A}$ , $V_{GS} = 4.5\ \text{V}$<br>at $V_{DS} = 15\ \text{V}$ , $I_D = 15\ \text{A}$ , $V_{GS} = 10\ \text{V}$ | $Q_g$        | -<br>- | 12<br>24 | -<br>-    | nC            |
| Gate to Source Charge<br>at $V_{DS} = 15\ \text{V}$ , $I_D = 15\ \text{A}$ , $V_{GS} = 4.5\ \text{V}$                                                                            | $Q_{gs}$     | -      | 3.3      | -         | nC            |
| Gate to Drain Charge<br>at $V_{DS} = 15\ \text{V}$ , $I_D = 15\ \text{A}$ , $V_{GS} = 4.5\ \text{V}$                                                                             | $Q_{gd}$     | -      | 6        | -         | nC            |
| Turn-On Delay Time<br>at $V_{GS} = 10\ \text{V}$ , $V_{DS} = 15\ \text{V}$ , $I_D = 15\ \text{A}$ , $R_g = 2.2\ \Omega$                                                          | $t_{d(on)}$  | -      | 13       | -         | nS            |
| Turn-On Rise Time<br>at $V_{GS} = 10\ \text{V}$ , $V_{DS} = 15\ \text{V}$ , $I_D = 15\ \text{A}$ , $R_g = 2.2\ \Omega$                                                           | $t_r$        | -      | 71       | -         | nS            |
| Turn-Off Delay Time<br>at $V_{GS} = 10\ \text{V}$ , $V_{DS} = 15\ \text{V}$ , $I_D = 15\ \text{A}$ , $R_g = 2.2\ \Omega$                                                         | $t_{d(off)}$ | -      | 13       | -         | nS            |
| Turn-Off Fall Time<br>at $V_{GS} = 10\ \text{V}$ , $V_{DS} = 15\ \text{V}$ , $I_D = 15\ \text{A}$ , $R_g = 2.2\ \Omega$                                                          | $t_f$        | -      | 21       | -         | nS            |
| <b>Body-Diode PARAMETERS</b>                                                                                                                                                     |              |        |          |           |               |
| Drain-Source Diode Forward Voltage<br>at $I_S = 1\ \text{A}$ , $V_{GS} = 0\ \text{V}$                                                                                            | $V_{SD}$     | -      | 0.7      | 1.2       | V             |
| Body-Diode Continuous Current                                                                                                                                                    | $I_S$        | -      | -        | 42        | A             |
| Body-Diode Continuous Current, Pulsed                                                                                                                                            | $I_{SM}$     | -      | -        | 120       | A             |
| Body Diode Reverse Recovery Time<br>at $I_S = 15\ \text{A}$ , $di/dt = 100\ \text{A} / \mu\text{s}$                                                                              | $t_{rr}$     | -      | 6.5      | -         | nS            |
| Body Diode Reverse Recovery Charge<br>at $I_S = 15\ \text{A}$ , $di/dt = 100\ \text{A} / \mu\text{s}$                                                                            | $Q_{rr}$     | -      | 1.4      | -         | nC            |



## Electrical Characteristics Curves

Fig. 1 Typical Output Characteristic

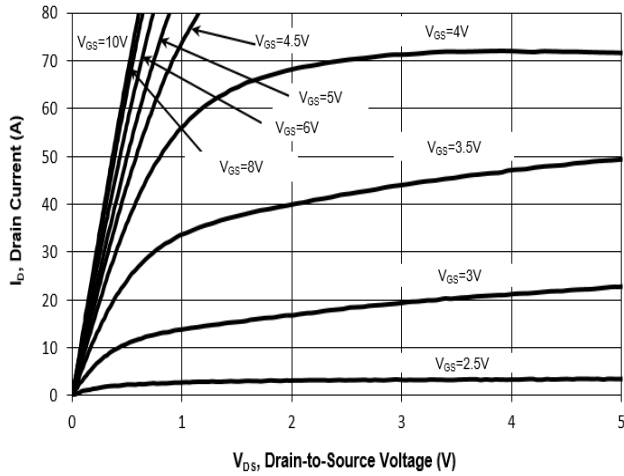


Fig. 2 Typical Transfer Characteristic

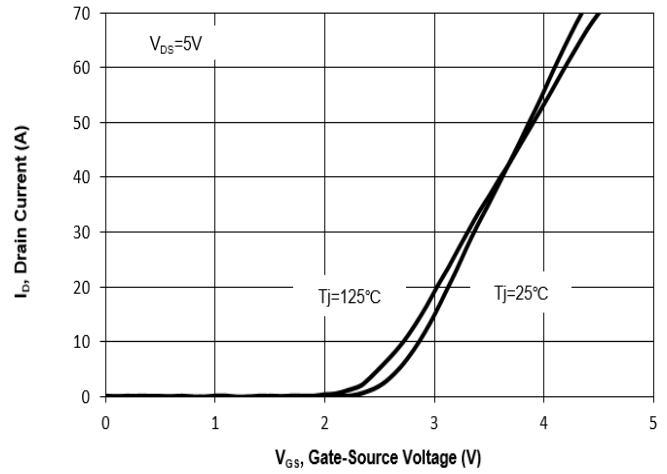


Fig. 3 on-Resistance vs. Gate Voltage

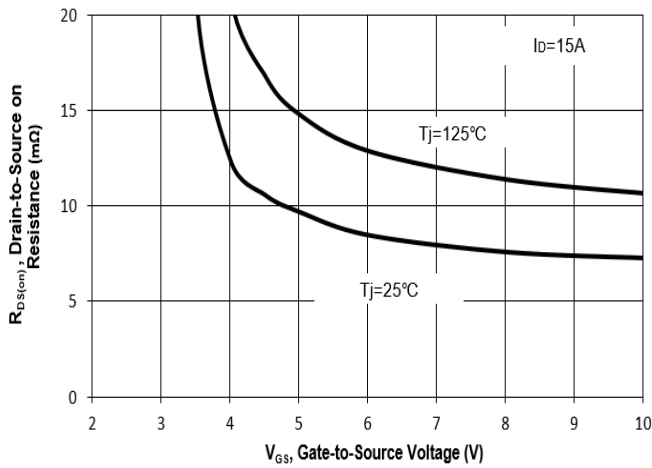


Fig. 4 on-Resistance vs.  $T_J$

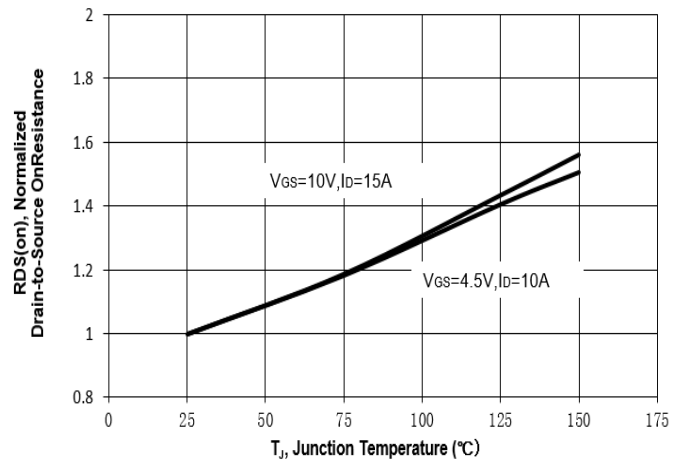


Fig. 5 on-Resistance vs. Drain Current



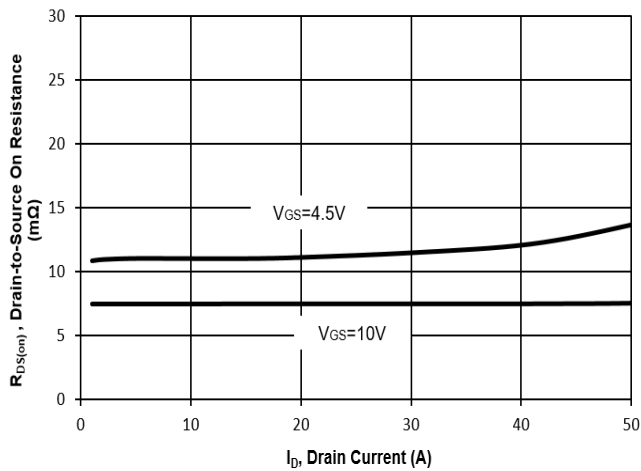


Fig. 6 Typical Body-Diode Forward Characteristic

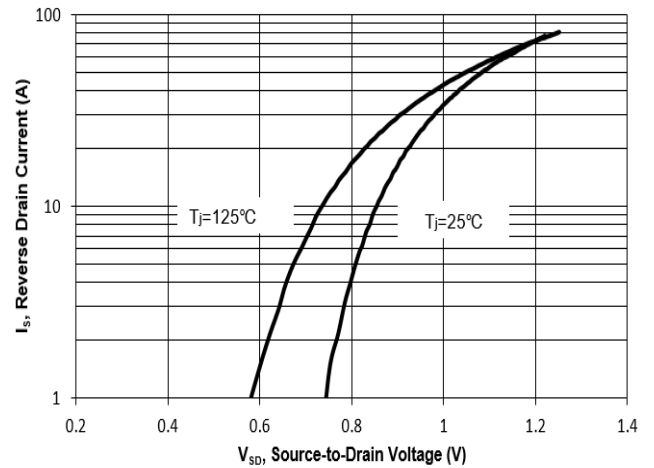

## Electrical Characteristics Curves

Fig. 7  $V_{(BR)DSS}$  vs. Junction Temperature

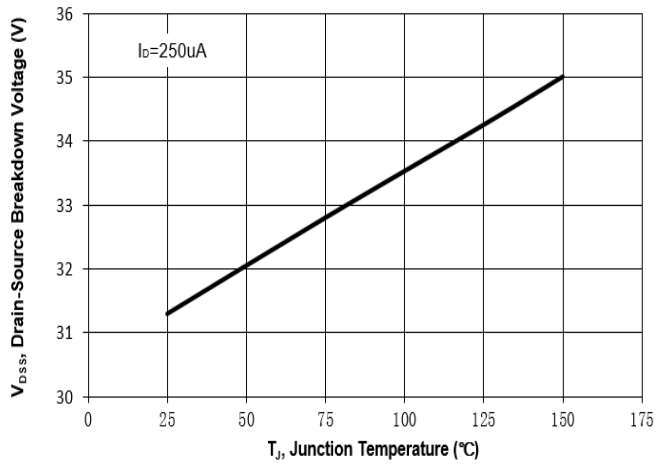


Fig. 8 Gate Threshold Variation vs.  $T_J$

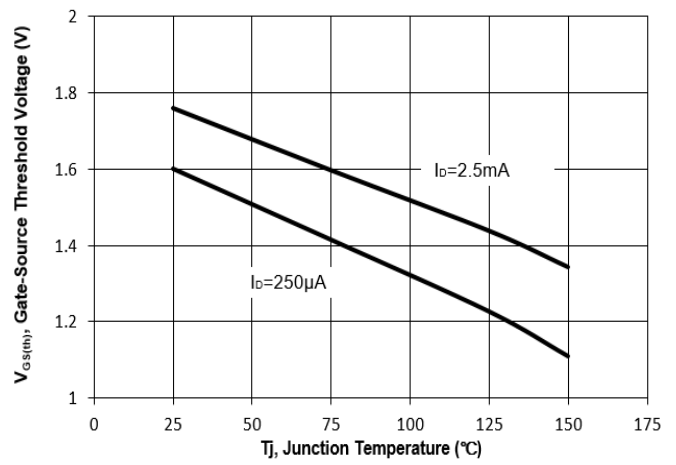


Fig. 9 Typical Junction Capacitance

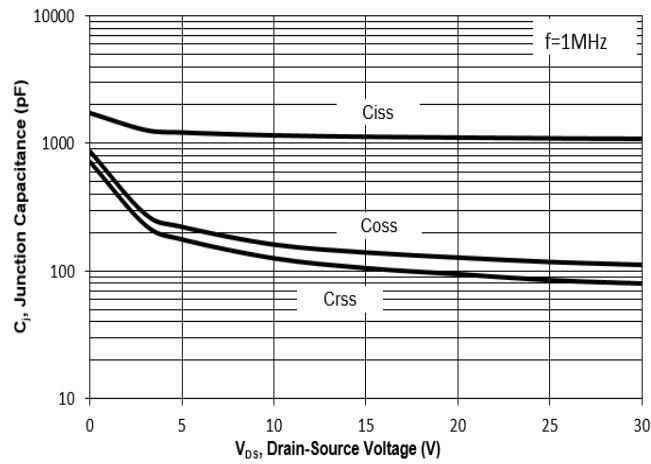


Fig. 10 Gate Charge

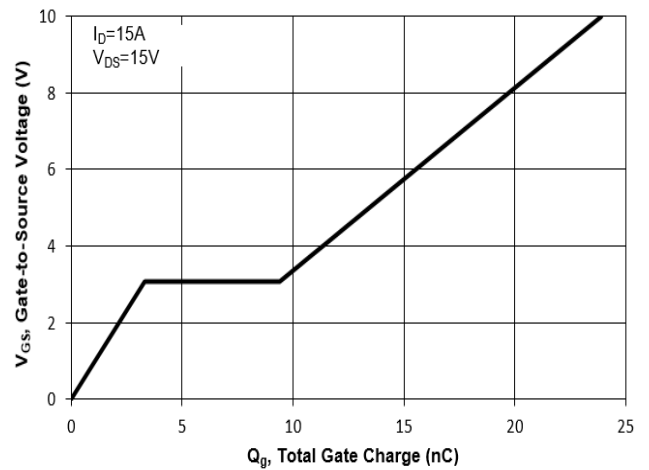


Fig. 11 Drain-Source Leakage Current vs.  $T_J$


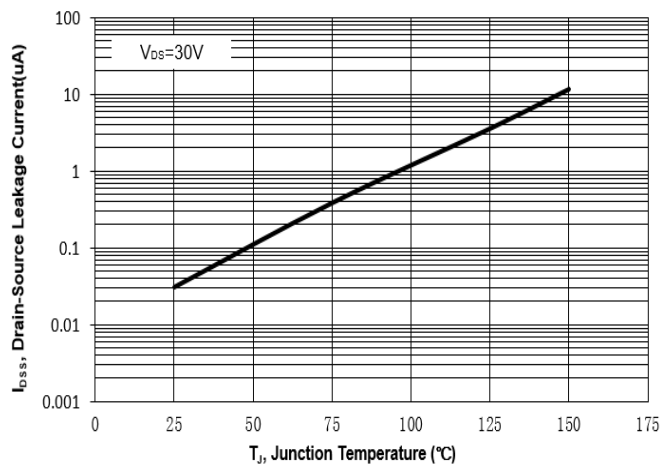


Fig. 12 Safe Operation Area

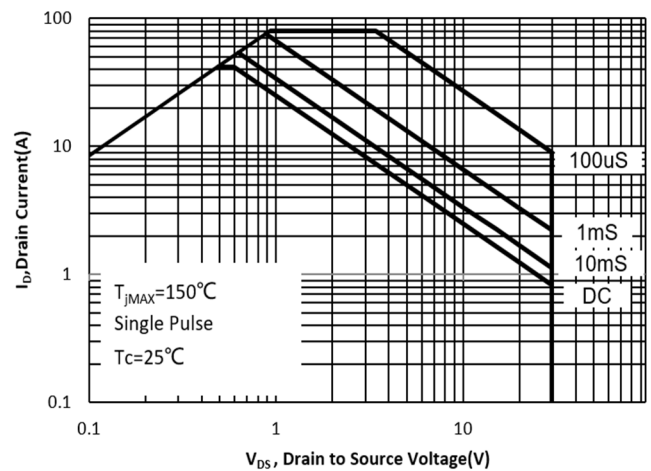

## Electrical Characteristics Curves

Fig.13 Normalized Maximum Transient Thermal Impedance( $Z_{\theta JA}$ )



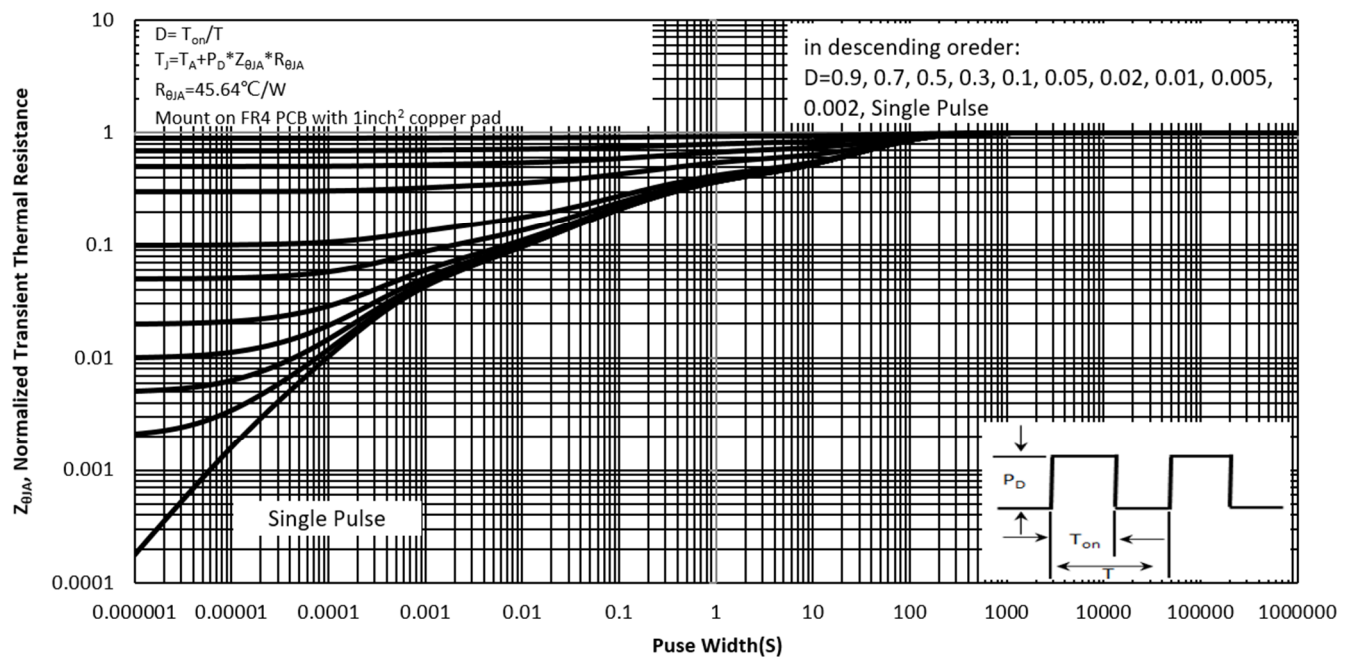


Fig.14 Normalized Maximum Transient Thermal Impedance( $Z_{\theta JC}$ )

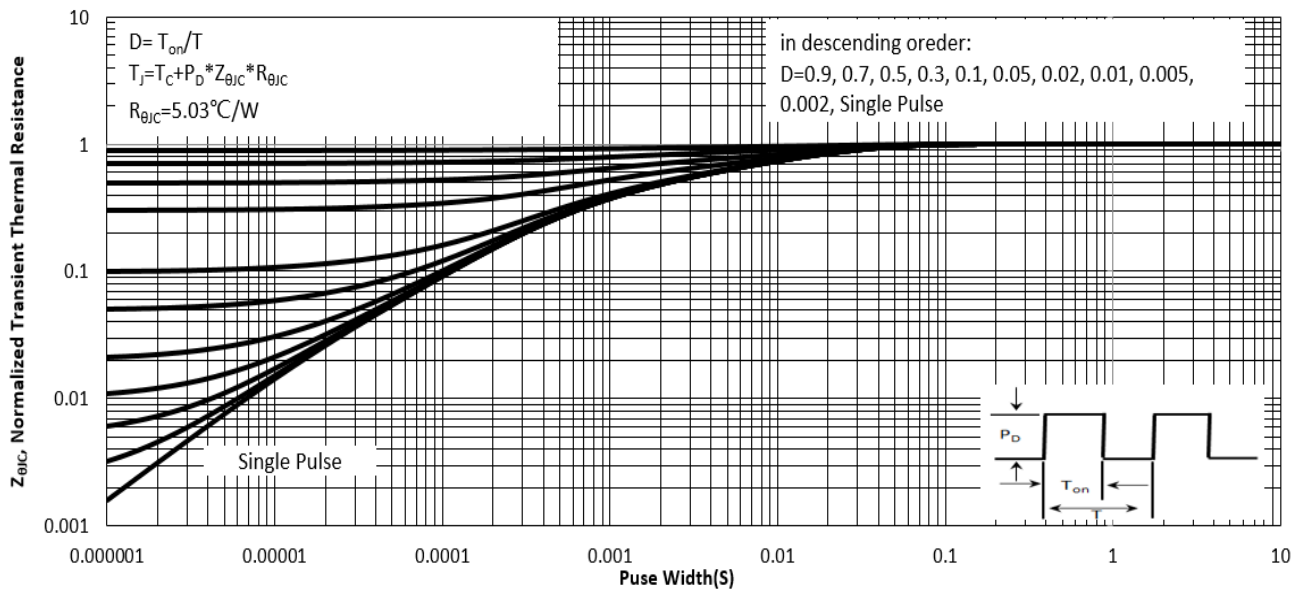

## Test Circuits

Fig.1-1 Switching times test circuit

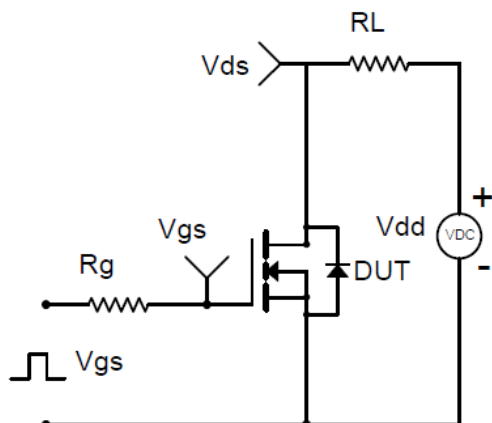


Fig.1-2 Switching Waveform

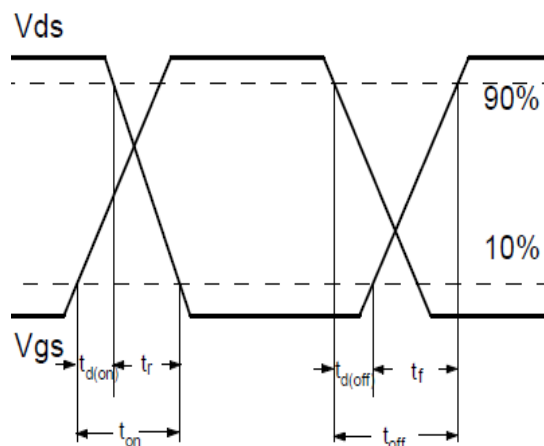


Fig.2-1 Gate charge test circuit

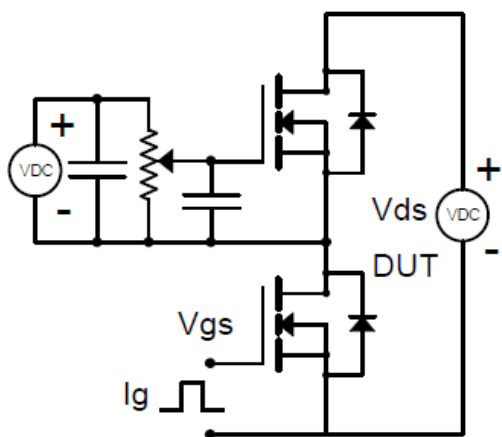


Fig.2-2 Gate charge waveform

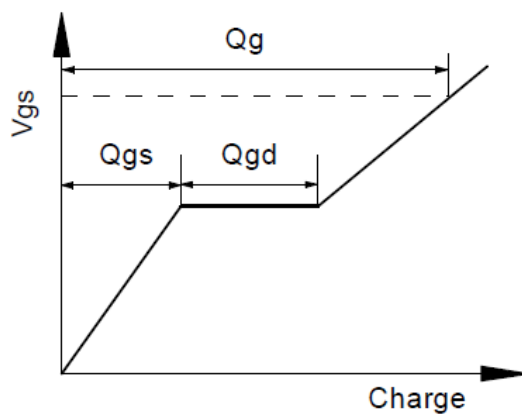


Fig.3-1 Avalanche test circuit


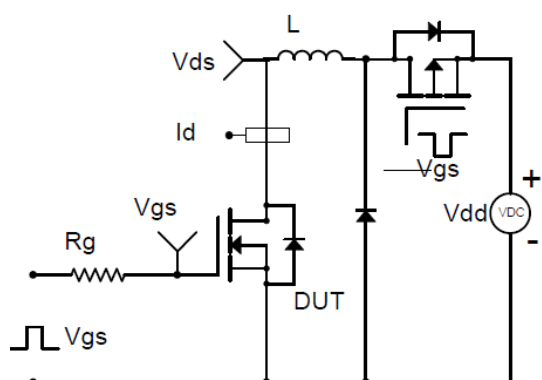



Fig.3-2 Avalanche waveform

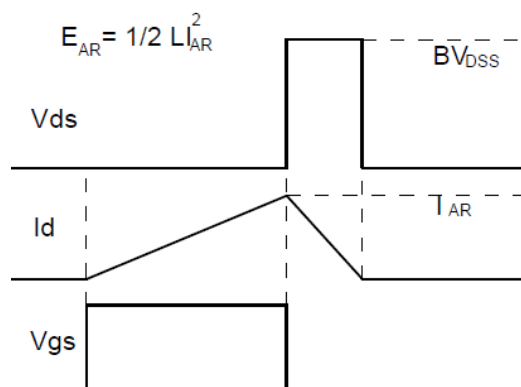

# WTM303N095LS-AH

## Package Outline Dimensions (Units: mm)


DFN3030

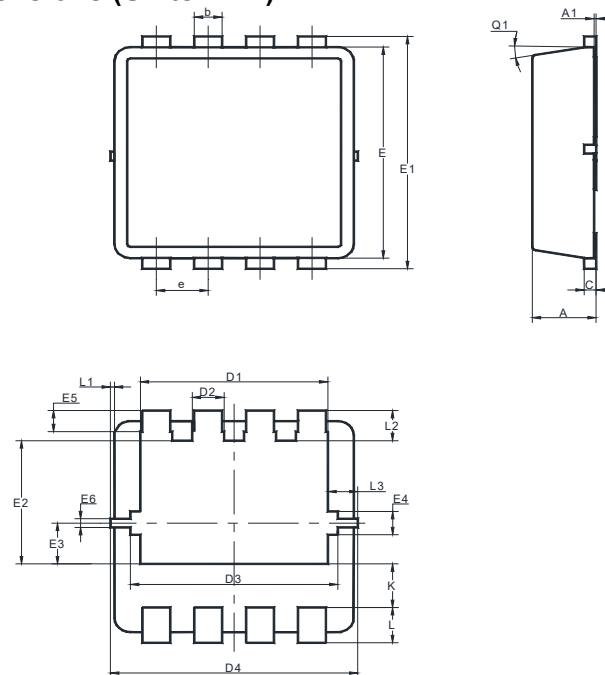

| UNIT | A   | A1   | b    | c    | D1  | D2  | D3  | D4  | E   | E1  | E2   | E3   | E4   |
|------|-----|------|------|------|-----|-----|-----|-----|-----|-----|------|------|------|
| mm   | 0.9 | 0.05 | 0.35 | 0.25 | 2.6 | 0.5 | 2.7 | 3.2 | 3.1 | 3.3 | 1.85 | 0.68 | 0.43 |
|      | 0.7 | 0    | 0.24 | 0.1  | 2.4 | 0.3 | 2.5 | 3   | 2.9 | 3.1 | 1.65 | 0.48 | 0.23 |

| UNIT | E5  | E6   | e   | K    | L   | L1  | L2   | L3    | θ1  |
|------|-----|------|-----|------|-----|-----|------|-------|-----|
| mm   | 0.4 | 0.25 | 0.7 | 0.72 | 0.5 | 0.1 | 0.53 | 0.475 | 12° |
|      | 0.2 | 0.15 | 0.6 | 0.52 | 0.3 | 0   | 0.33 | 0.275 | 0°  |

## Recommended Soldering Footprint



## Packing information



| Package | Tape Width (mm) | Pitch   |               | Reel Size |      | Per Reel Packing Quantity |
|---------|-----------------|---------|---------------|-----------|------|---------------------------|
|         |                 | mm      | inch          | mm        | inch |                           |
| DFN3030 | 12              | 8 ± 0.1 | 0.315 ± 0.004 | 330       | 13   | 5,000                     |

## Marking information

" TM303N095LS " = Part No.

" \*\*\*\*\* " = Date Code Marking

Font type: Arial



## **IMPORTANT NOTICE**

Our company and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes to improve product design, functions and reliability without further notice to this document and any product described herein.

Statements described herein regarding the reliability and suitability of products is for illustrative purposes only. Products specifically described herein are not authorized for use as critical components in life support devices, automobile, military, aviation or aerospace only with the written approval of our company.

The information contained herein is presented only as guidance for product use. No license to any intellectual property rights is granted under this document. No responsibility is assumed by our company for any infringement of patents or any other intellectual property rights of third party that may result from the use of the product.

