

2SC2383U-HAF


NPN Silicon Epitaxial Planar Transistor

The transistor is subdivided into three groups, R, O and Y, according to its DC current gain.

On special request, these transistors can be manufactured in different pin configurations.

Features

- Halogen and Antimony Free(HAF), RoHS compliant




1.Base 2.Collector 3.Emitter
SOT-89 Plastic Package

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)








Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	160	V
Collector Emitter Voltage	V_{CEO}	160	V
Emitter Base Voltage	V_{EBO}	6	V
Collector Current	I_C	1	A
Base Current	I_B	0.5	A
Collector Power Dissipation	P_{tot}	900	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_{CE} = 5\text{ V}$, $I_C = 200\text{ mA}$ Current Gain Group R O Y	h_{FE}	60	-	120	-
	h_{FE}	100	-	200	-
	h_{FE}	160	-	320	-
	h_{FE}				
Collector Base Cutoff Current at $V_{CB} = 150\text{ V}$	I_{CBO}	-	-	1	μA
Emitter Base Cutoff Current at $V_{EB} = 6\text{ V}$	I_{EBO}	-	-	1	μA
Collector Emitter Breakdown Voltage at $I_C = 10\text{ mA}$	$V_{(BR)CEO}$	160	-	-	V
Collector Emitter Saturation Voltage at $I_C = 500\text{ mA}$, $I_B = 50\text{ mA}$	$V_{CE(sat)}$	-	-	1.5	V
Base Emitter Voltage at $I_C = 5\text{ mA}$, $V_{CE} = 5\text{ V}$	V_{BE}	0.45	-	0.75	V
Transition Frequency at $V_{CE} = 5\text{ V}$, $I_C = 200\text{ mA}$	f_T	20	100	-	MHz
Collector Output Capacitance at $V_{CB} = 10\text{ V}$, $f = 1\text{ MHz}$	C_{ob}	-	-	20	pF




Electrical Characteristics Curves

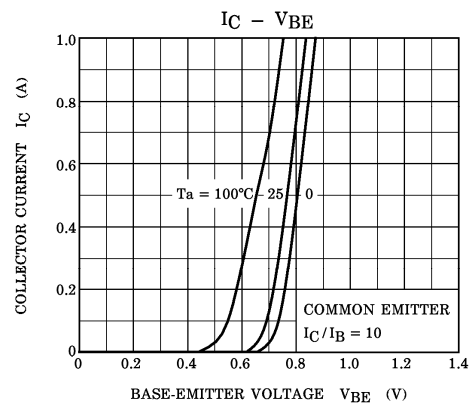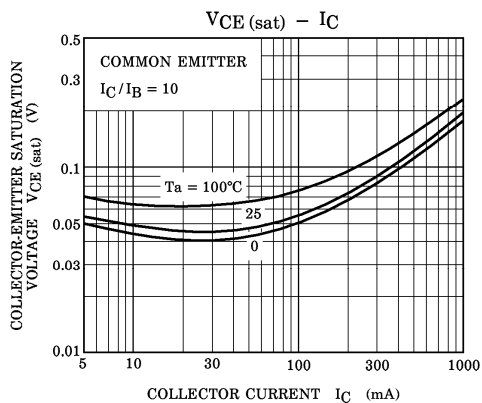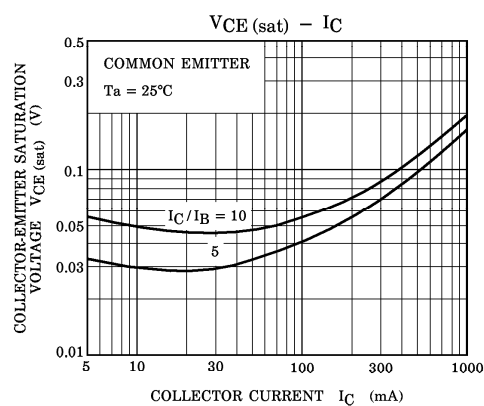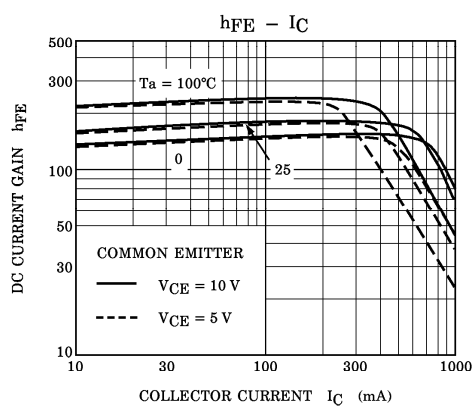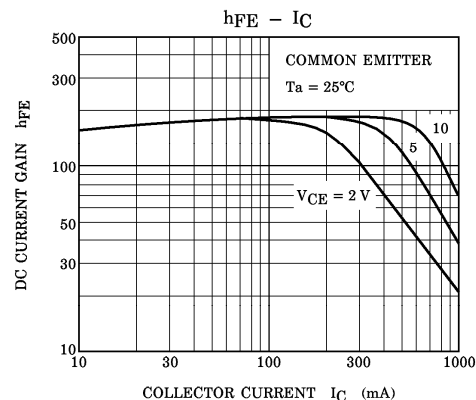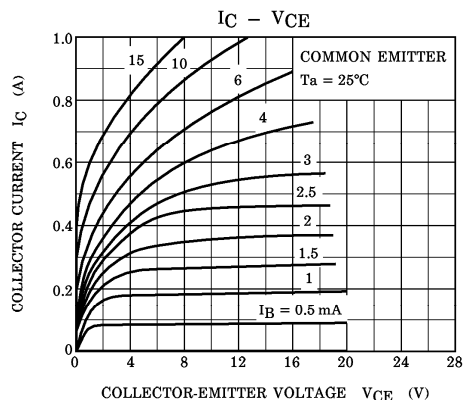

2SC2383U-HAF

Package Outline (Dimensions in mm)

SOT-89

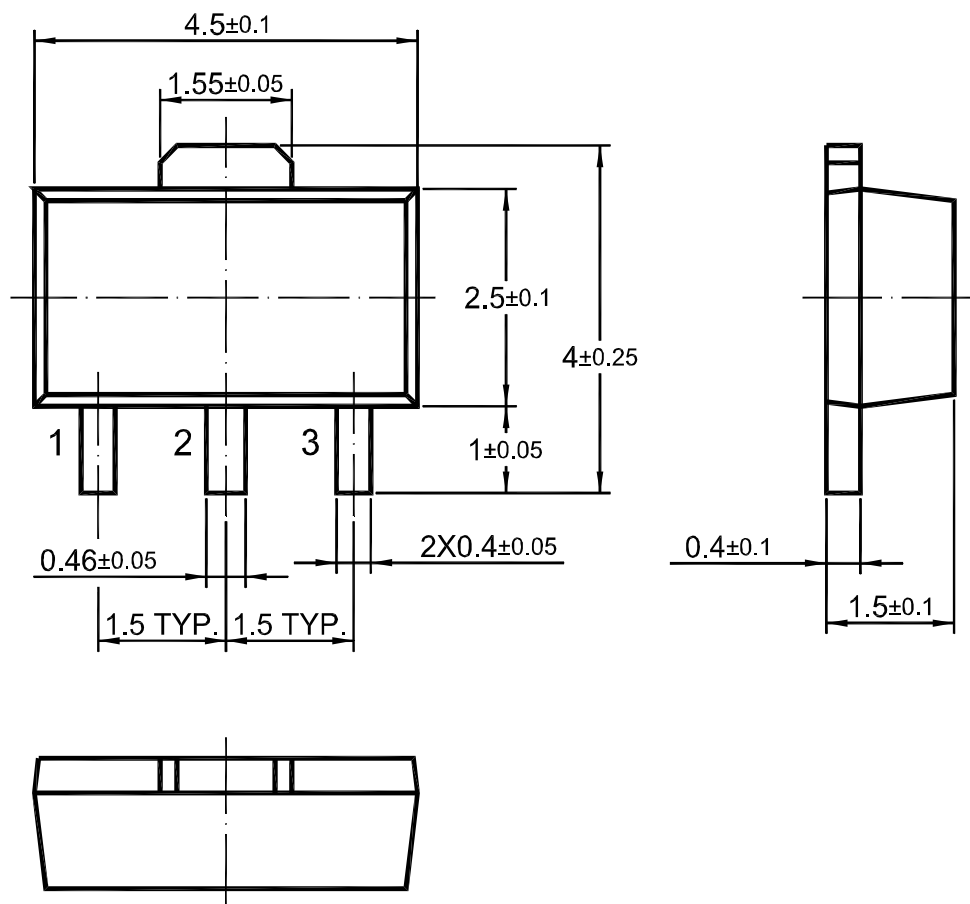

Marking information

"**" = Part No.

"•" = HAF (Halogen and Antimony Free)

"YM" = Date Code Marking

"Y" = Year

"M" = Month

Font type: Arial

